
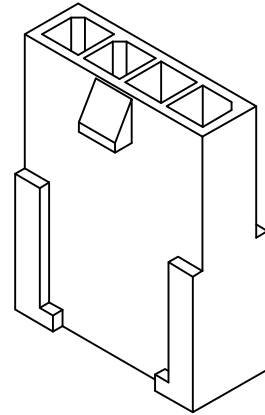


RoHS
COMPLIANT

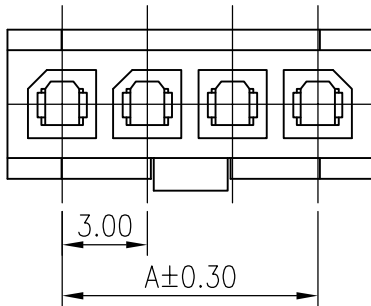

◆ SPECIFICATIONS

- Current rating: 5A AC, DC
- Voltage rating: 250V AC, DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 1500V AC/ minute.
- Contact resistance: 10mΩ Max.



Material: Nylon66 UL94 V-2
 Suitable: KR3000HM series Terminal
 Mates With KR3000HF Series Single Row Housing
 And KR3000WF Series Single Row Wafer
 MOQ: 1,000PCS

Ordering Code:

H3000F *** 04 01B

No. of Circuits
 102: 2P, 112: 12P

Insulator Material
 04: PA66 Black V-2

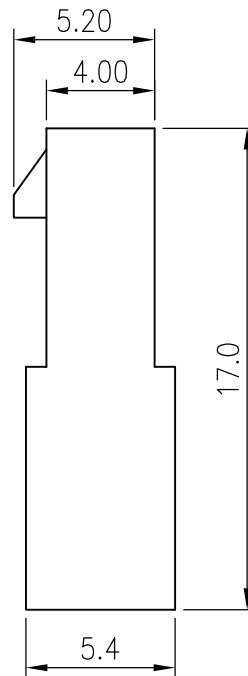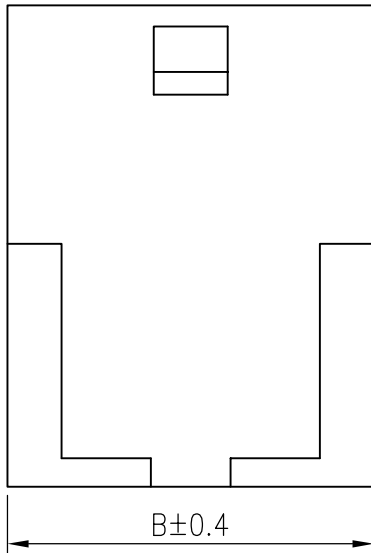

Circuits	Dimensions	
	A	B
2P	3.0	7.00
3P	6.0	10.00
4P	9.0	13.00
5P	12.0	16.00
6P	15.0	19.00
7P	18.0	22.00
8P	21.0	25.00
9P	24.0	28.00
10P	27.0	31.00
11P	30.0	34.00
12P	33.0	37.00

F					TOLERANCE	TITLE:	DRAWN:	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd.			
					X. X ±0.30	MK 3.0 Single Row	CHECKED:				
		Change the part number and frame format	ZSZ	2022.03.14	X. XX ±0.20	Female Housing	APPROVED:	PART NO. : H3000F***0401B			
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE	X. XXX ±0.10	No Wings	UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION	REV. : A2
	1	2	3	4	5	6	7	8	9		