

◆SPECIFICATIONS

- Current rating: 0.4A AC, DC
- Voltage rating: 50V AC,DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 100MΩ Min.
- Withstanding voltage: 250V AC/ minute.
- Contact resistance: 30mΩ Max.

Material:


- Insulator: LCP UL 94V-0
- Actuator: LCP
- Contact: Phosphor Bronze
- Peg: Phosphor Bronze
- Plating: Tin plated over Nickel
- Circuits: 4~60


$A = 0.50 * (\text{circuit} - 1)$
 $B = A + 1.10$
 $C = A + 6.50$
 $D = A + 7.20$

*Available in 4 through 60 circuits

F	④			GENERAL TOLERANCE		UNIT: mm		DATE		TITLE:	
	③			.X±0.20	X°±1°	DRAWN:	闵昕皓	2015.04.30	0.5mm pitch 2.0H 卧式半包上接		
	②			.XX±0.10	.X°±	CHECKED:			VER.	SCALE:	N/A
	①			.XXX±0.05	.XX°±	APPROVED:	周志龙	2015.04.30	A	SHEET:	1/1
	LTR	NAME	DATE	VERISION RECORD							


东莞市康瑞电子有限公司
 Dongguan Konnra Electronics co., LTD.

PROJECTION  PART NO. F0500120DxxSD110
 DRAWING NO. F0500WHS04-1-S

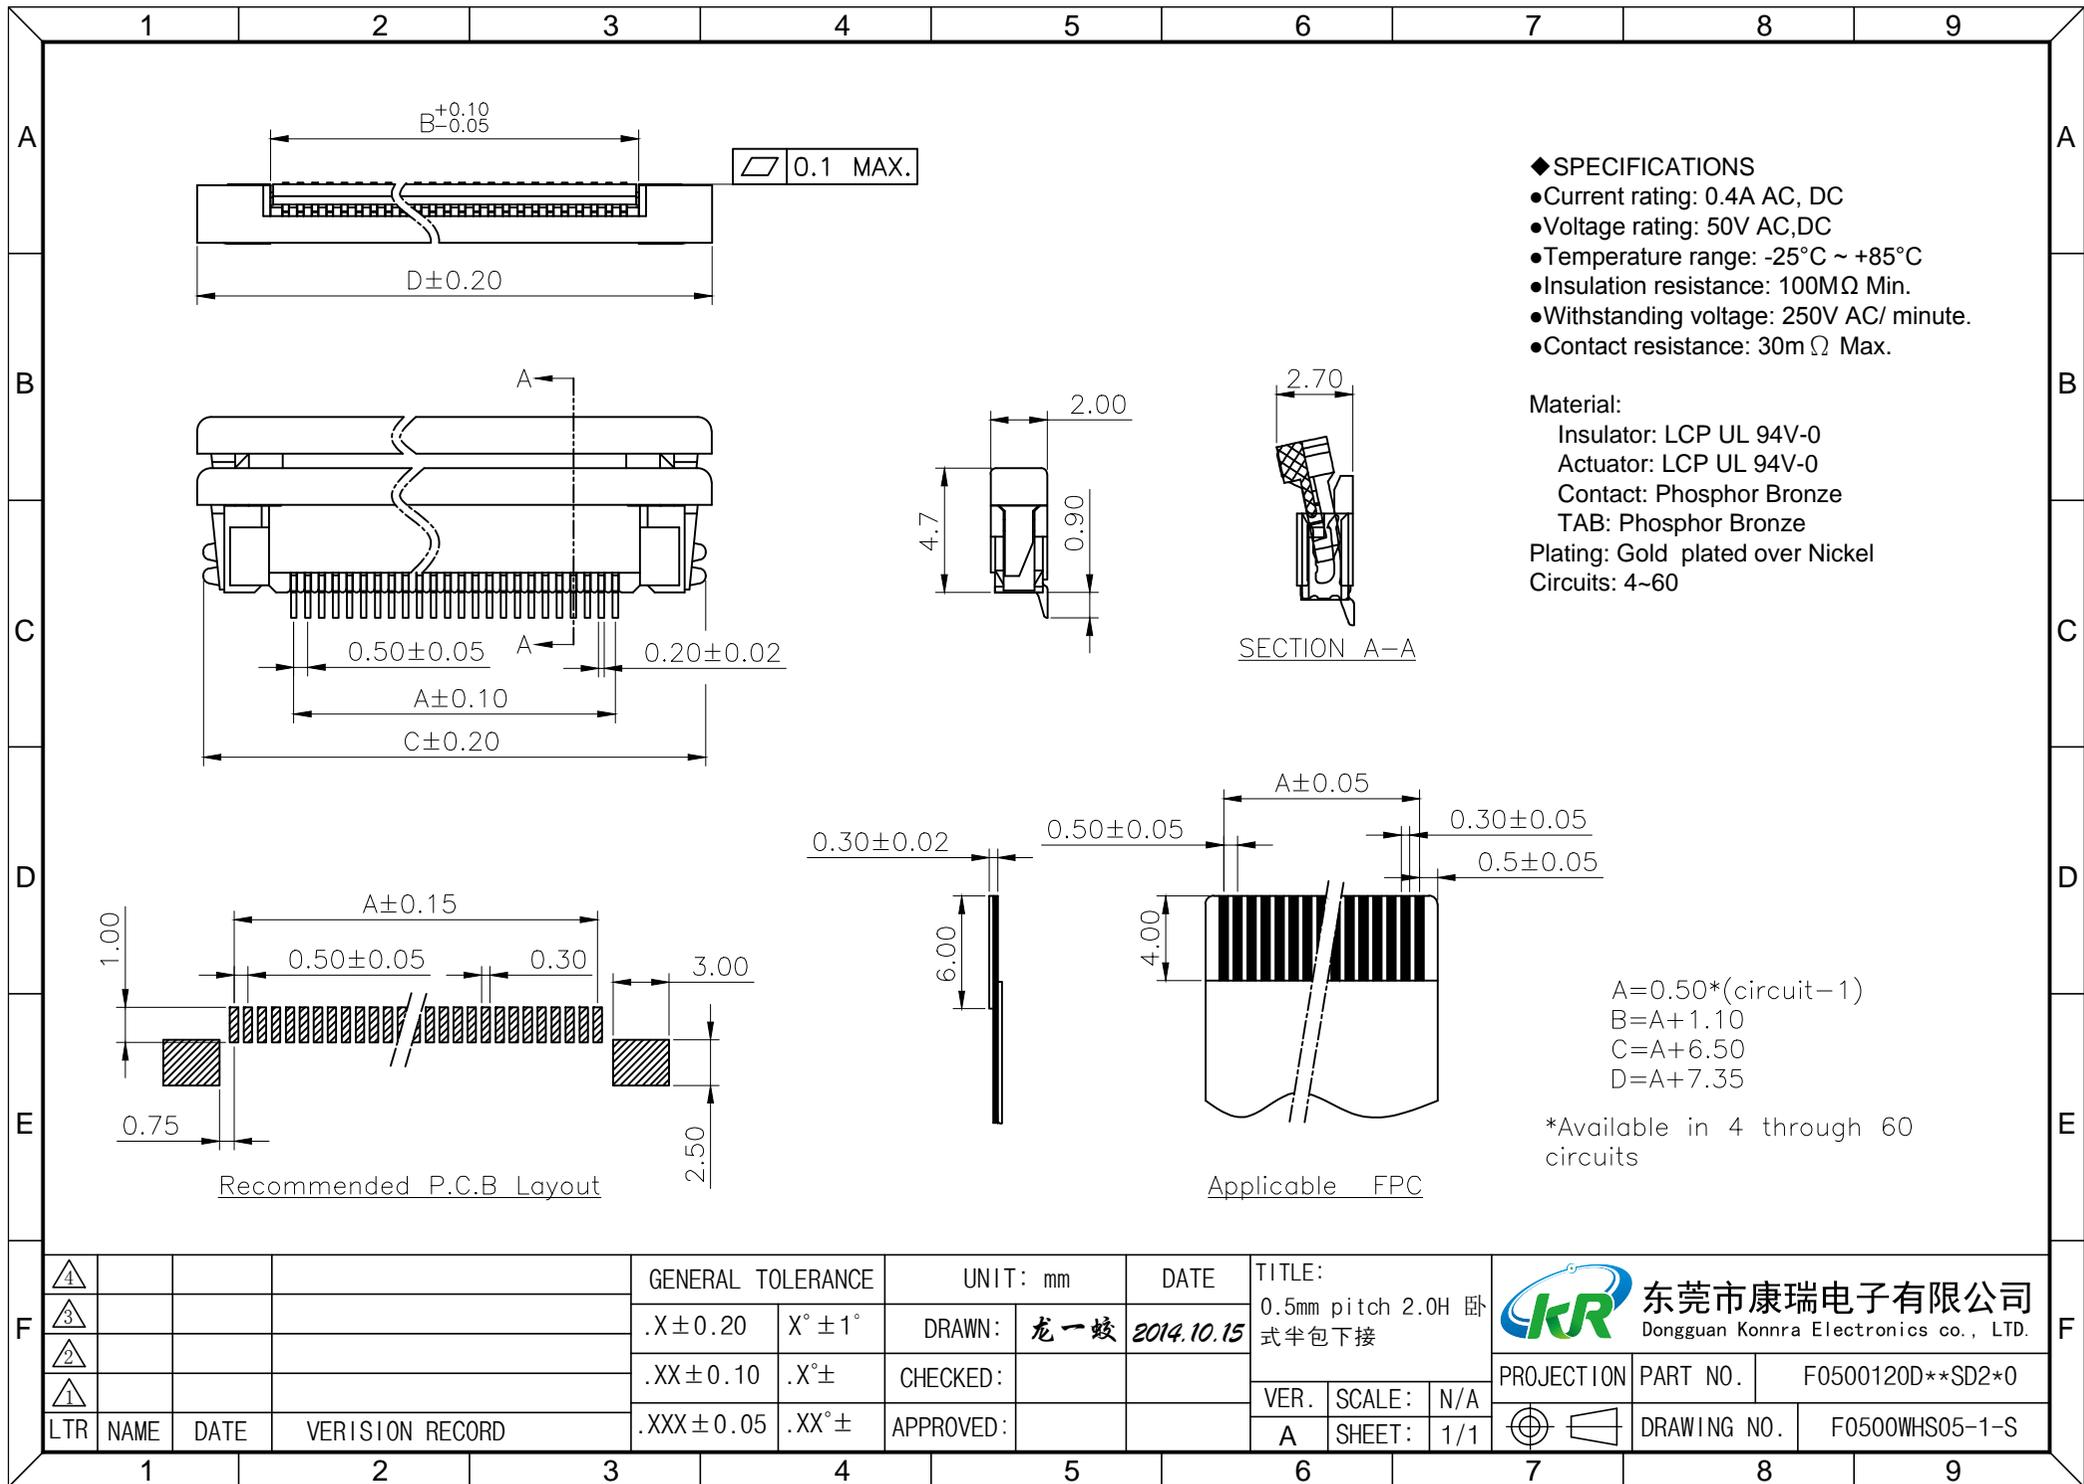

◆ SPECIFICATIONS

- Current rating: 0.4A AC, DC
- Voltage rating: 50V AC, DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 100MΩ Min.
- Withstanding voltage: 250V AC/ minute.
- Contact resistance: 30mΩ Max.

Material:
 Insulator: LCP UL 94V-0
 Actuator: LCP UL 94V-0
 Contact: Phosphor Bronze
 TAB: Phosphor Bronze
 Plating: Gold plated over Nickel
 Circuits: 4~60

$A = 0.50 * (\text{circuit} - 1)$
 $B = A + 1.10$
 $C = A + 6.50$
 $D = A + 7.35$

*Available in 4 through 60 circuits

F	④			GENERAL TOLERANCE		UNIT: mm		DATE		TITLE:		东莞市康瑞电子有限公司 Dongguan Konnra Electronics co., LTD.	F		
	③			.X ± 0.20	X° ± 1°	DRAWN:	龙一蛟	2014.10.15	0.5mm pitch 2.0H 卧式半包下接		PROJECTION 			PART NO.	F0500120D**SD2*0
	②			.XX ± 0.10	.X° ±	CHECKED:			VER.	SCALE:					
	①			.XXX ± 0.05	.XX° ±	APPROVED:			A	SHEET:	1/1			DRAWING NO.	F0500WHS05-1-S
LTR	NAME	DATE	VERISION RECORD												