
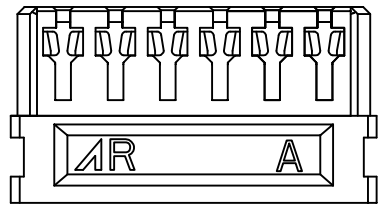
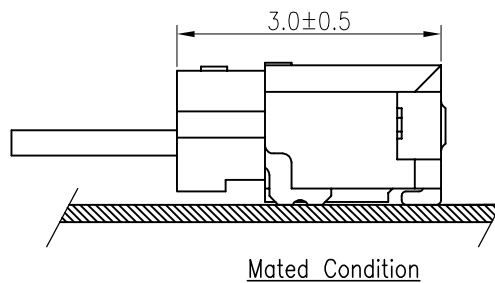
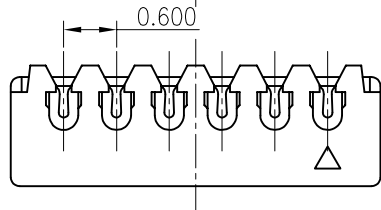

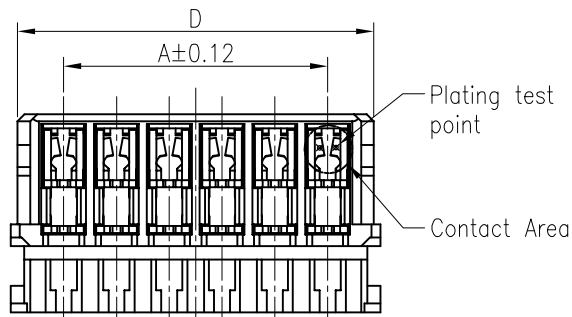
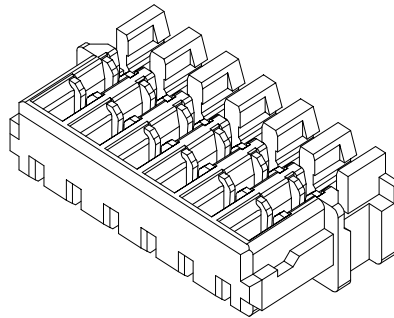


RoHS
COMPLIANT

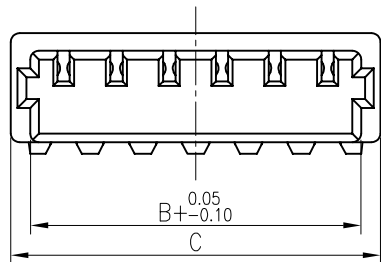

SPECIFICATIONS

- Current rating: 0.2A AC, DC(36AWG)
0.3AAC, DC(34AWG)
- Voltage rating: 30V AC,DC
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 100MΩ Min.
- Withstanding voltage: 200V AC/ minute.
- Contact resistance: 40mΩ Max.

Material:

Housing: LCP UL 94V-0
Contact: Phosphor bronze/Gold flash over nickel
Applicable wire:
AWG #36,AWG #34
Insulation OD: Ø0.29±0.02mm(AWG #36)
Ø0.32±0.02mm(AWG #34)
Mate with KR0600 series Wafer

Ordering code:

H06000 *** 14 01RA

No. of Circuits
102:2,116:16

Insulator Material
13:LCP Natural
14:LCP Black

Circuits	Dimensions			
	A	B	C	D
2	0.60	1.36	1.80	1.65
4	1.80	2.56	2.40	2.85
5	2.40	3.16	3.00	3.45
6	3.00	3.76	3.60	4.05
7	3.60	4.36	4.20	4.65
8	4.20	4.96	5.40	5.25
10	5.40	6.16	6.60	6.45
12	6.60	7.36	7.80	7.65
16	9.00	9.76	10.20	10.05



MARK

1

2

3

4

5

6

7

8

9

TOLERANCE

X. X ±0.30
X. XX ±0.20
X. XXX ±0.10
Angle ±2°

TITLE:
XSRO.6 Housing

UNIT: mm SCALE: N/A

DRAWN: Arvin 2021.01.04

CHECKED:

APPROVED:

SHEET: 1/1 PROJECTION

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co., Ltd.

PART NO. : H06000***1401A

REV. : A1 DRAWING NO. : 0600H101-A-S

RoHS
COMPLIANT

SPECIFICATIONS






1. Current rating: 0.2A AC, DC(36AWG)
0.3AAC, DC(34AWG)
2. Voltage rating: 30V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 100MΩ Min.
5. Withstanding voltage: 200V AC/ minute.
6. Contact resistance: 40mΩ Max.

Material:

Insulator: LCP UL 94V-0
Contact: Phosphor bronze/Gold flash over nickel
Fitting Nail: Brass/Matte plated over nickel
Plating: Gold flash over Nickel
Mate with KR0600 series housing

C0600RS *** 14 G01 01RA
No. of Circuits 102:2,116:16
Insulator Material 14:LCP Black
Plating G01:Gold flash

Circuits	Dimensions			
	A	B	C	D
2	0.60	1.36	3.00	2.35
4	1.80	2.56	4.20	3.55
5	2.40	3.16	4.80	4.15
6	3.00	3.76	5.40	4.75
7	3.60	4.36	6.00	5.35
8	4.20	4.96	6.60	5.95
10	5.40	6.16	7.80	7.15
12	6.60	7.36	9.00	8.35
14	7.80	8.56	10.20	9.55
16	9.00	9.76	11.40	10.75

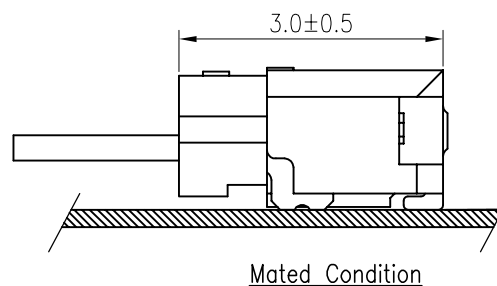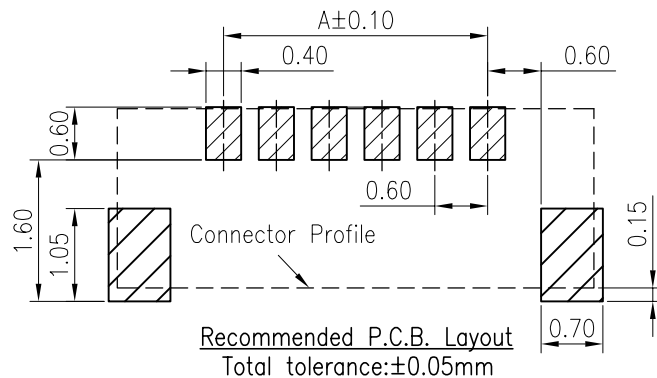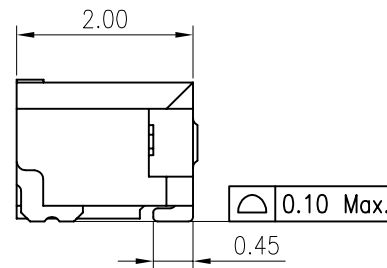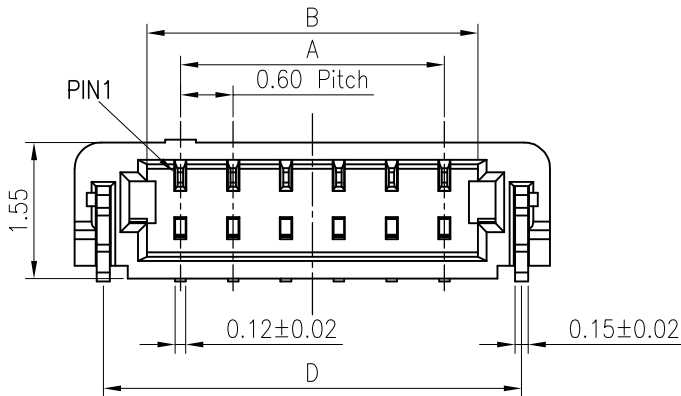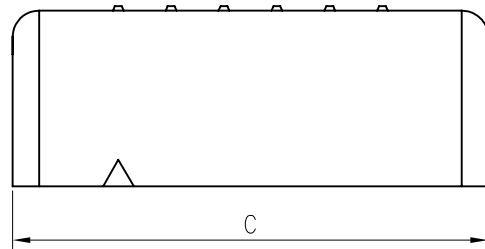

F					TOLERANCE X. X ±0.30 X. XX ±0.20 X. XXX ±0.10 Angle ±2°	TITLE: XSRO.6 SMT 90° Wafer	DRAWN: Arvin 2020.08.04	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd.	
MARK	REVISION DESCRIPTION	SIGNATURE	DATE	UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION	REV. : A1	DRAWING NO. : 0600WRS101-A-S