
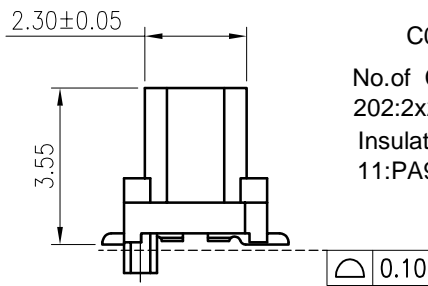
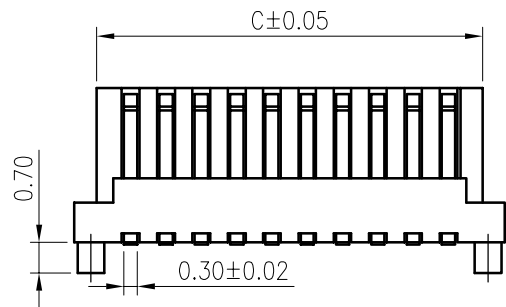




RoHS
COMPLIANT

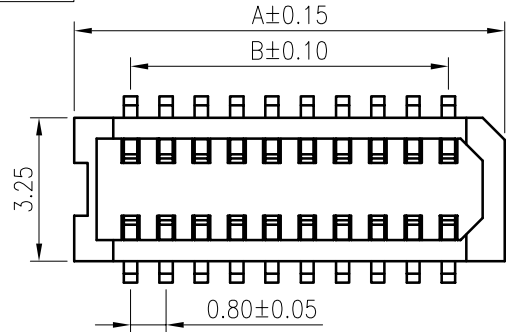

Ordering Code:

C0802VS *** 01 G01 01RA
 No. of Circuits }
 202:2x2,226:2x26 } Plating
 Insulator Material } G01:Gold flash
 11:PA9T Natural }



SPECIFICATIONS

1. Current rating: 1A AC, DC
2. Voltage rating: 100V AC,DC
3. Temperature range: -25°C ~ +85°C
4. Insulation resistance: 500MΩ Min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 40mΩ Max.

Material:

Insulator: PA9T UL 94V-0
 Contact: Phosphor bronze
 Plating: Gold flash over Nickel
 Mate with KR0802 series plug
 Q'ty: 1,000PCS/Reel

Circuits	Dimensions			
	A	B	C	D
2x2	3.35	0.80	2.35	2.60
2x3	4.15	1.60	3.15	3.40
2x4	4.95	2.40	3.95	4.20
2x5	5.75	3.20	4.75	5.00
2x6	6.55	4.00	5.55	5.80
2x7	7.35	4.80	6.35	6.60
2x8	8.15	5.60	7.15	7.40
2x9	8.95	6.40	7.95	8.20
2x10	9.75	7.20	8.75	9.00
2x11	10.55	8.00	9.55	9.80
2x12	11.35	8.80	10.35	10.60
2x13	12.15	9.60	11.15	11.40
2x14	12.95	10.40	11.95	12.20
2x15	13.75	11.20	12.75	13.00
2x16	14.55	12.00	13.55	13.80
2x17	15.35	12.80	14.35	14.60
2x18	16.15	13.60	15.15	15.40
2x19	16.95	14.40	15.95	16.20
2x20	17.75	15.20	16.75	17.00
2x21	18.55	16.00	17.55	17.80
2x22	19.35	16.80	18.35	18.60
2x23	20.15	17.60	19.15	19.40
2x24	20.95	18.40	19.95	20.20
2x25	21.75	19.20	20.75	21.00
2x26	22.55	20.00	21.55	21.80

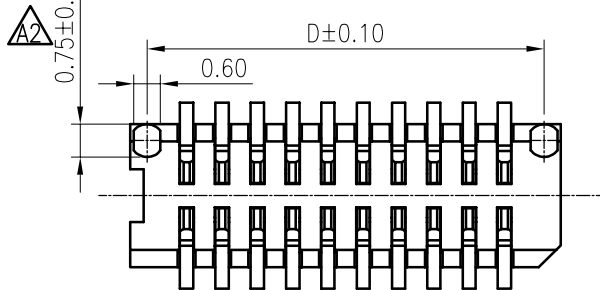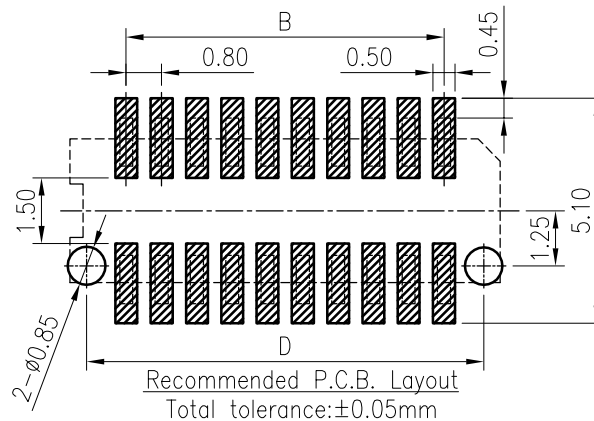

MARK

REVISION DESCRIPTION	SIGNATURE	DATE
Modify Size	ZSZ	2022.03.29
Modify Dimension	Arvin	2020.03.24

TOLERANCE
X. X ±0.30
X. XX ±0.20
X. XXX ±0.10
Angle ±2°

TITLE:
 0.8 BTB Side Insert
 SMT 180° Socket
 With Pillar
 UNIT: mm SCALE: N/A

DRAWN: Arvin 2020.03.24
 CHECKED:
 APPROVED:
 SHEET: 1/1 PROJECTION

KONNRA 东莞市康瑞电子有限公司
 DongGuan Konnra Electronics Co., Ltd.
 PART NO.: C0802VSxxx11G0101RA
 REV.: A3 DRAWING NO.: 0802WMS201-A-S