
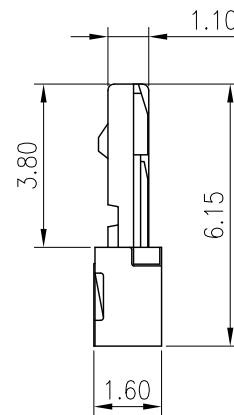
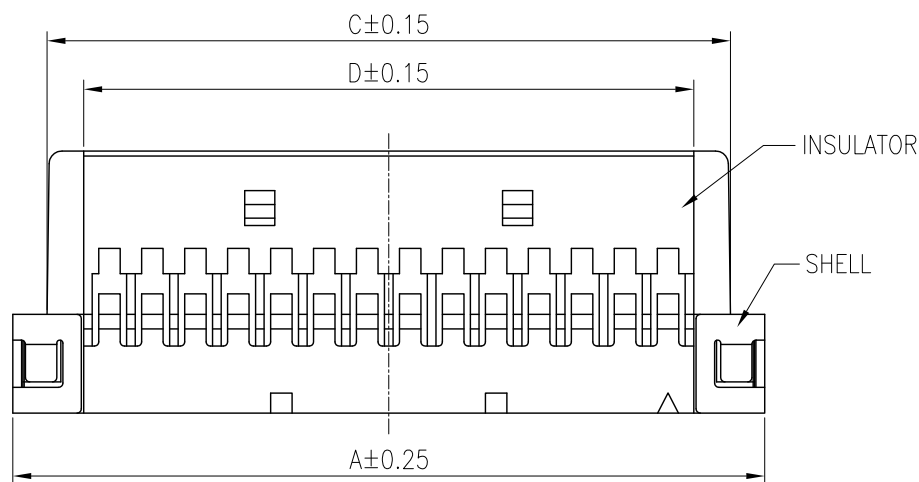
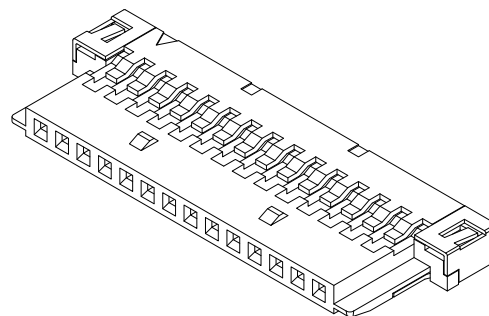


RoHS
COMPLIANT

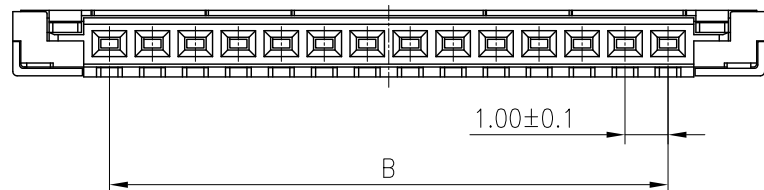

SPECIFICATIONS

1. Current rating: 1A AC, DC
2. Voltage rating: 100V AC, DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 500MΩ/ min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 30mΩ/ max.

Material:

Insulator: PA66 UL 94V-0
Shell: Stainless Steel
Circuits: 08, 14, 20, 30
Suitable KR1002 series terminal

Ordering Code:

H10020 120 22 01A

No. of Circuits }
120:20, 120:30 }
Insulator Material }
22: PA66 Beige }

Circuits	Dimensions			
	A	B	C	D
8	11.50	7.00	9.90	8.44
14	17.50	13.00	15.90	14.44
20	23.50	19.00	21.90	20.44
30	33.50	29.00	31.90	30.44

F	A4			TOLERANCE	TITLE:	DRAWN:	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd. PART NO.: H10020***2201A REV.: A2 DRAWING NO.: 1002H101-A-S	
	A3	Uniformly arrange the drawings	Shen	2021.08.25	DF19 Housing	CHECKED:		
	A2	Change the part number and frame format	Arvin	2020.04.15		APPROVED:		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE	Angle ±2°	UNIT:mm		SCALE: 1/1