
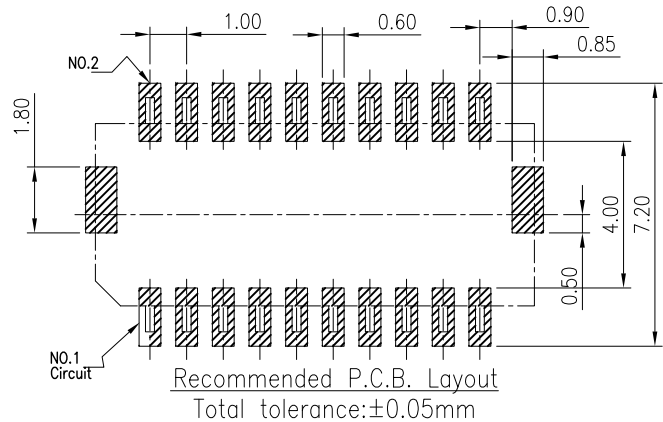
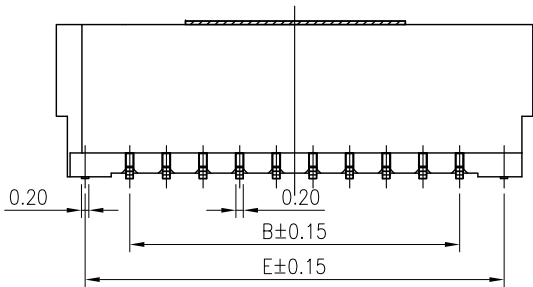
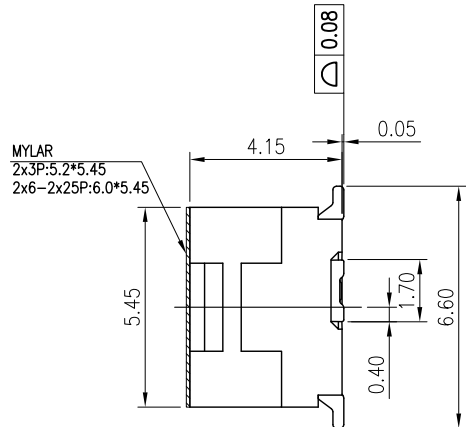


RoHS
COMPLIANT

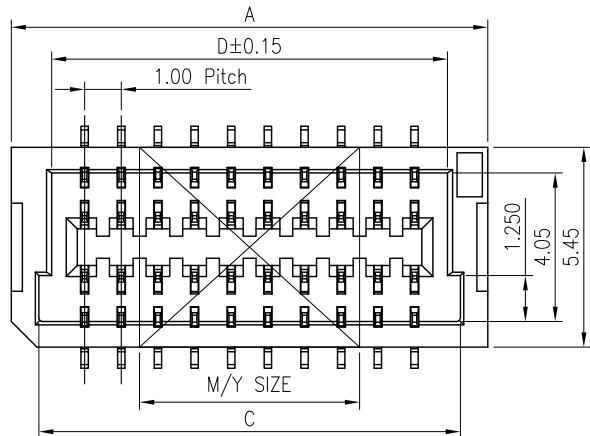

SPECIFICATIONS

1. Current rating: 1A AC, DC
2. Voltage rating: 50V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 500MΩ/ min.
5. Withstanding voltage: 300V AC/ minute.
6. Contact resistance: 55mΩ/ max.

Material:

Insulator: LCP UL 94V-0
 Contact: Copper alloy
 Solder Nail: Copper alloy
 Plating: Gold flash or matte tin plated over Nickel
 Mate with KR1007 series housing

Ordering Code:

C1007VS *** ** *** 01 * A
 No.of Circuits ———— Packing
 203:2x3,225:2x25 ———— T:Tube
 Insulator Material ———— R:Tape&Reel
 13:LCP Natural ———— Plating
 14:LCP Black ———— M01: Matte tin plated
 G01:Gold flash

Circuits	Dimensions				
	A	B	C	D	E
2x3	6.00	2.00	4.5	3.80	4.43
2x5	8.00	4.00	6.5	5.80	6.43
2x6	9.00	5.00	7.5	6.80	7.43
2x10	13.00	9.00	11.5	10.80	11.43
2x15	18.00	14.00	16.5	15.80	16.43
2x20	23.00	19.00	21.5	20.80	21.43
2x25	28.00	24.00	26.5	25.80	26.43

				TOLERANCE	TITLE:	DRAWN: <i>Arwin 2021.08.25</i>		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.			
				X.X ±0.30	SHLD1.0 SMT 180°	CHECKED: <i>Shen 2021.08.25</i>					
				X.XX ±0.20	Wafer	APPROVED:		PART NO.: C1007VS*****01*A			
				X.XXX ±0.10		UNIT:mm	SCALE: 1/1	SHEET: 1/1	PROJECTION	REV.: A2	DRAWING NO.: 1007WVS201-A-S
				Angle ±2°							