
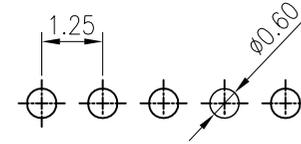
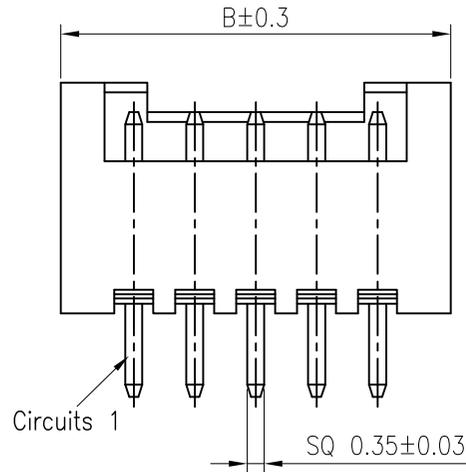
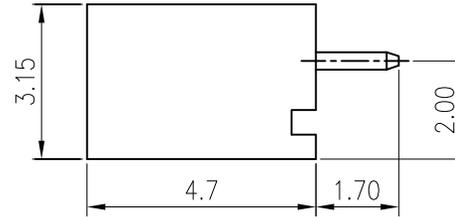


**RoHS**  
COMPLIANT

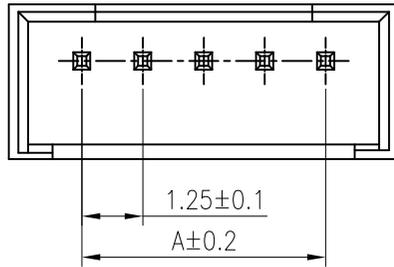

Recommended P.C.B. Layout  
Total tolerance: ±0.05mm

**SPECIFICATIONS**

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC, DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20mΩ/ max.

**Material:**

Insulator: PA66 UL94 V-0

Contact: Brass

Plating: Tin plated over Nickel

Mate with KR1254 series housing

**Ordering Code:**

C1254VD \*\*\* 17 T01 01PA

No. of Circuits: 17  
102:02, 115:15  
Plating: T01: Tin plated

Insulator Material: 17: PA66 Brown V0

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2	1.25	4.25	9	10.00	13.00
3	2.50	5.50	10	11.25	14.25
4	3.75	6.75	11	12.50	15.50
5	5.00	8.00	12	13.75	16.75
6	6.25	9.25	13	15.00	18.00
7	7.50	10.50	14	16.25	19.25
8	8.75	11.75	15	17.50	20.50

MARK	REVISION DESCRIPTION	SIGNATURE	DATE	TOLERANCE	TITLE:	DRAWN:	CHECKED:	APPROVED:	REV.:	DRAWING NO.:
A4						Shen 2021.08.30			A3	KONNRA 东莞市康瑞电子有限公司
A3	Uniformly arrange the drawings	Shen	2021.08.30	X.X ±0.30	JAE 1.25 DIP 180°				A2	DongGuan Konnra Electronics Co.,Ltd.
A2	Change the part number and frame format	Arvin	2020.04.10	X.XX ±0.20	Wafer					PART NO.: C1254VD***17T0101PA
				X.XXX ±0.10						
				Angle ±2°						
					UNIT:mm	SCALE: 1/1	SHEET: 1/1	PROJECTION		DRAWING NO.: 1254WVD101-A-S