



**RoHS**  
COMPLIANT

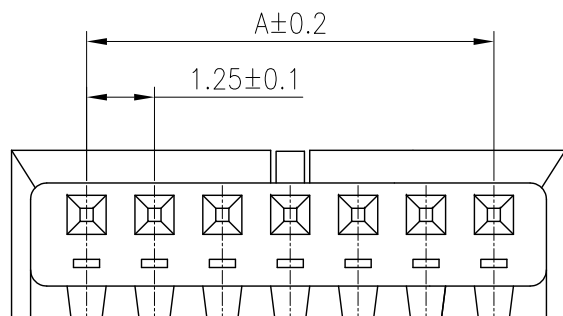

**SPECIFICATIONS**

1. Current rating: 1A AC, DC
2. Voltage rating: 200V AC, DC
3. Temperature range:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
4. Insulation resistance: 1000M $\Omega$ / min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 20m $\Omega$ / max.



Material: PA66 UL94 V-0  
Suitable KR1254 series terminal  
Mate with KR1254 series wafer

Ordering Code:

H12540 102 17 01A

No. of Circuits  
102:02, 115:15

Insulator Material  
17:PA66 Brown V0

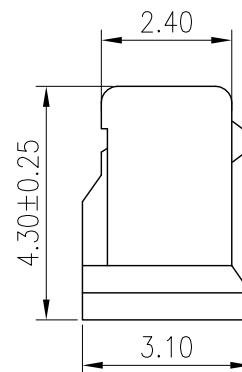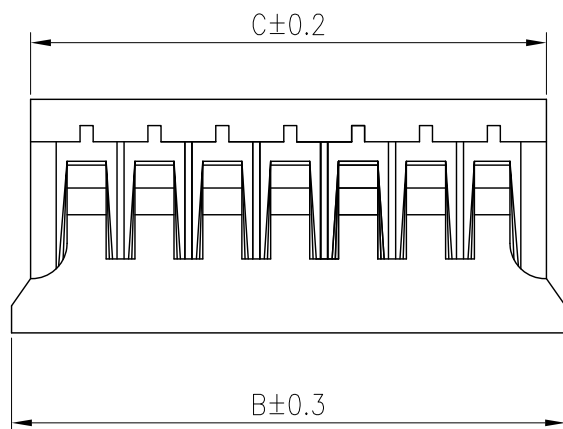

Circuits	Dimensions			Circuits	Dimensions		
	A	B	C		A	B	C
2	1.25	3.95	3.25	9	10.00	12.70	12.00
3	2.50	5.20	4.50	10	11.25	13.98	13.25
4	3.75	6.45	5.75	11	12.50	15.20	14.50
5	5.00	7.70	7.00	12	13.75	16.45	15.75
6	6.25	8.95	8.25	13	15.00	17.70	17.00
7	7.50	10.20	9.50	14	16.25	18.95	18.25
8	8.75	11.45	10.75	15	17.50	20.20	19.50

MARK	REVISION	DESCRIPTION	SIGNATURE	DATE	TOLERANCE	TITLE:	DRAWN:	CHECKED:	APPROVED:	REV.:	DRAWING NO.:
A3	1	Uniformly arrange the drawings	Shen	2021.08.30	X.X $\pm 0.30$	JAE 1.25 Housng	Shen 2021.08.30			A3	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd. PART NO.: H125401081701A DRAWING NO.: 1254H101-A-S
A2	2	Change the part number and frame format	Arvin	2020.03.05	X.XX $\pm 0.20$						
					X.XXX $\pm 0.10$						
					Angle $\pm 2^{\circ}$	UNIT:mm	SCALE:1/1	SHEET:1/1	PROJECTION		