



**RoHS**  
COMPLIANT

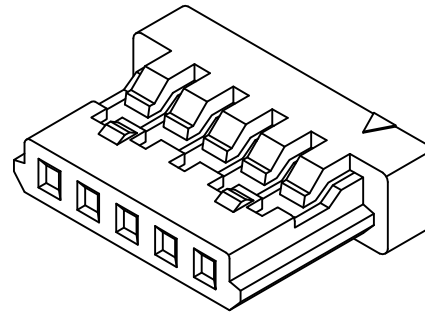

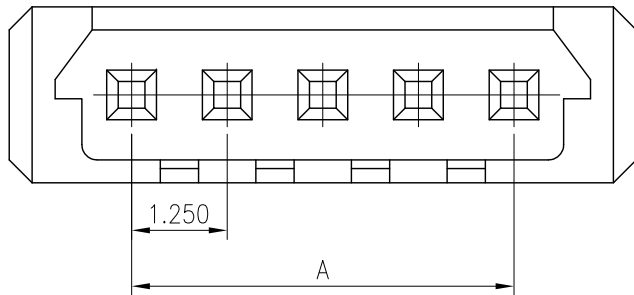

**SPECIFICATIONS**

1. Current rating: 1A AC, DC
2. Voltage rating: 150V AC, DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 500MΩ Min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 30mΩ Max.



Material: PA66 UL 94V-0  
Suitable KR1255 series terminal  
Mate with KR1255 series wafer

Ordering Code:

 H12550 \*\*\* 19 01C

No. of Circuits   
102:2, 130:30

Insulator Material  
19:PA66 Grey V0

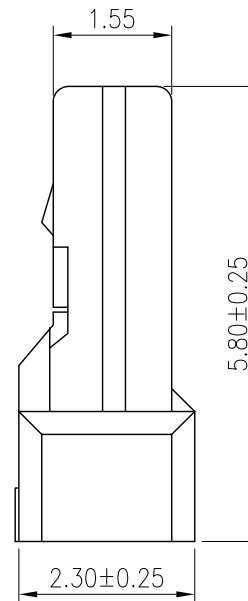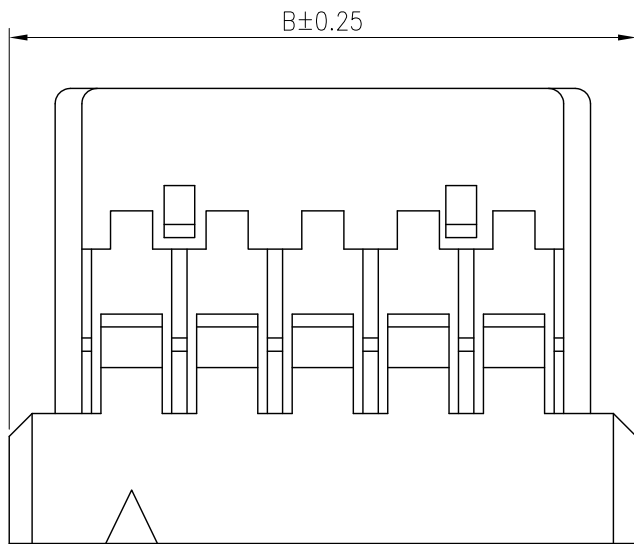

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2	1.25	4.50	11	12.50	15.75
3	2.50	5.75	12	13.75	17.00
4	3.75	7.00	13	15.00	18.25
5	5.00	8.25	14	16.25	19.50
6	6.25	9.50	15	17.50	20.75
7	7.50	10.75	20	23.75	27.00
8	8.75	12.00	25	30.00	33.25
9	10.00	13.25	30	36.25	39.50
10	11.25	14.50			

MARK	REVISION	DESCRIPTION	SIGNATURE	DATE	TOLERANCE	TITLE:	DRAWN:	CHECKED:	APPROVED:	REV.:	DRAWING NO.:
A3	1	Uniformly arrange the drawings	Shen	2021.08.30	X.X ±0.30	DF14 Housing	Shen 2021. 8. 30			A3	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd. PART NO.:H12550***1901C DRAWING NO.:1255H101-C-S
A2	2	Change the part number and frame format	LJT	2020.03.30	X.XX ±0.20						
	3				X.XXX ±0.10						
					Angle ±2°	UNIT:mm	SCALE:1/1	SHEET:1/1	PROJECTION 