

RoHS
COMPLIANT

SPECIFICATIONS




1. Current rating: 1A AC, DC
2. Voltage rating: 150V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 500MΩ Min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 30m Ω Max.

Material:

Insulator: PA66 UL 94V-0
Contact: Brass
Plating: Tin plated over Nickel
Mate with KR1256 series Housing

C1256VD * 19 T01 01 PA**

No. of Circuits —
102:2P
115:15P

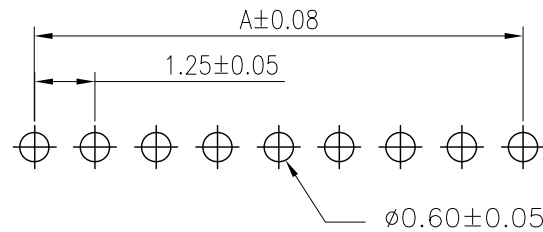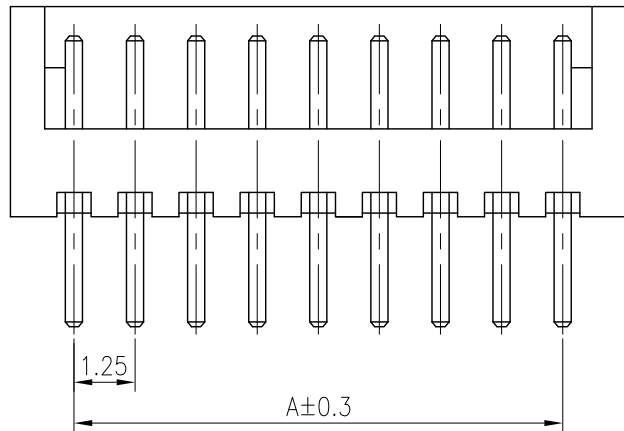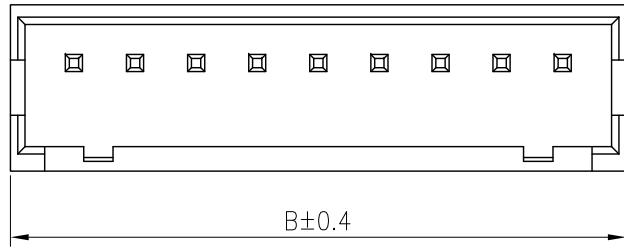

Recommended P.C.B. Layout
Total tolerance:±0.05mm

Circuits	Dimensions	
	A	B
2	1.25	3.75
3	2.50	5.00
4	3.75	6.25
5	5.00	7.50
6	6.25	8.75
7	7.50	10.00
8	8.75	11.25
9	10.00	12.50
10	11.25	13.75
11	12.50	15.00
12	13.75	16.25
13	15.00	17.50
14	16.25	18.75
15	17.50	20.00

F	A3	Uniformly arrange the drawings	Shen	2021.08.31	TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±2°	TITLE: DF13 DIP 180° Wafer		DRAWN: <i>Shen 2021.08.31</i>		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.		
		A2	Change the part number and frame format	LJT				2020.04.24	CHECKED:			
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE	UNIT:mm	SCALE:1/1	SHEET:1/1	PROJECTION	REV.:A3	PART NO.:C1256VD***19T0101PA		
	1	2	3	4	5	6	7	8	9	DRAWING NO.:1256WVD101-A-S		