



RoHS  
COMPLIANT

SPECIFICATIONS


1. Current rating: 1A AC, DC
2. Voltage rating: 150V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 500MΩ Min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 30m Ω Max.

Material: PA66 UL 94V-0  
Suitable KR1258 series terminal  
Mate with KR1258 series wafer  
Ordering Code:


 H12580 \*\*\* 01 01B

No. of Circuits   
102:2,118:18  
Insulator Material  
01:PA66 White V0





Circuits	Dimension		
	A	B	C
2	1.25	4.40	2.75
3	2.50	5.65	4.00
4	3.75	6.90	5.25
5	5.00	8.15	6.50
6	6.25	9.40	7.75
7	7.50	10.65	9.00
8	8.75	11.90	10.25
9	10.00	13.15	11.50
10	11.25	14.40	12.75
11	12.50	15.65	14.00
12	13.75	16.90	15.25
13	15.00	18.15	16.50
14	16.25	19.40	17.75
15	17.50	20.65	19.00
20	23.75	26.90	25.25
25	30.00	33.15	31.50
30	36.25	39.40	37.75

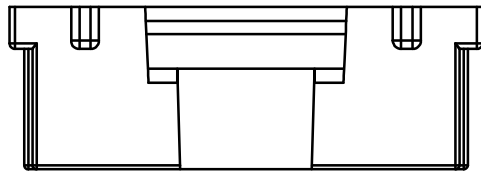





11-30P

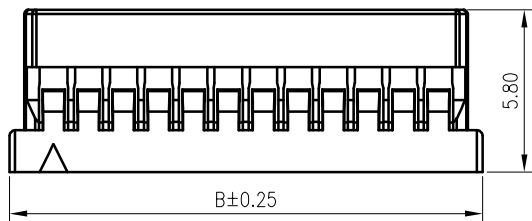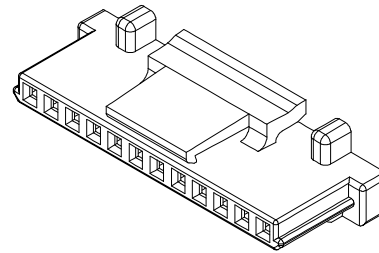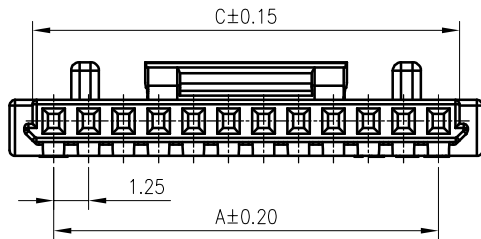

2-10P



F					TOLERANCE X. X ±0.30 X. XX ±0.20 X. XXX ±0.10 Angle ±2°	TITLE: DF14 Have buckle Housing	DRAWN: Liujiangtian 2020.04.24		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd.		
		Change the part number	Arvin	2020.11.25			CHECKED:				
		Change the part number and frame format	LJT	2020.04.24			APPROVED:		PART NO. : H12580***0101B		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE			UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION 	REV. : A3