
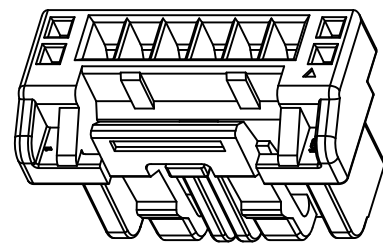
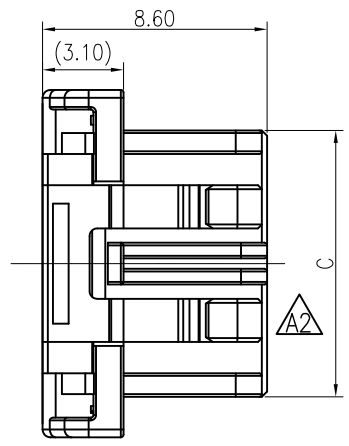
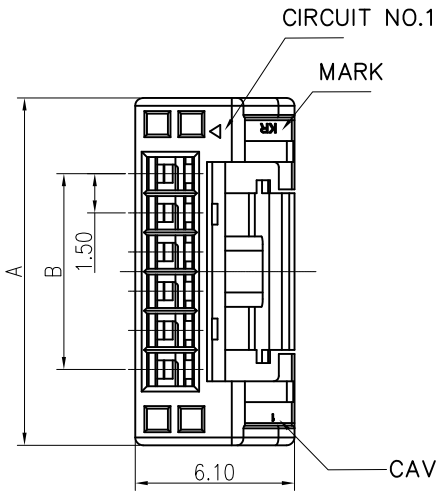


RoHS
COMPLIANT



SPECIFICATIONS


1. Current rating: 3A (AWG #24)AC, DC
2. Voltage rating: 100V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance:500MΩ Min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 20mΩ Max.

Material: PBT UL94 V-0
Suitable: KR1507 series terminal
Mate with KR1507 series wafer

Ordering Code:

H15070 *** 24 01A

No.of Circuits
102:02,
115:15
Insulator Material
24:PBT White

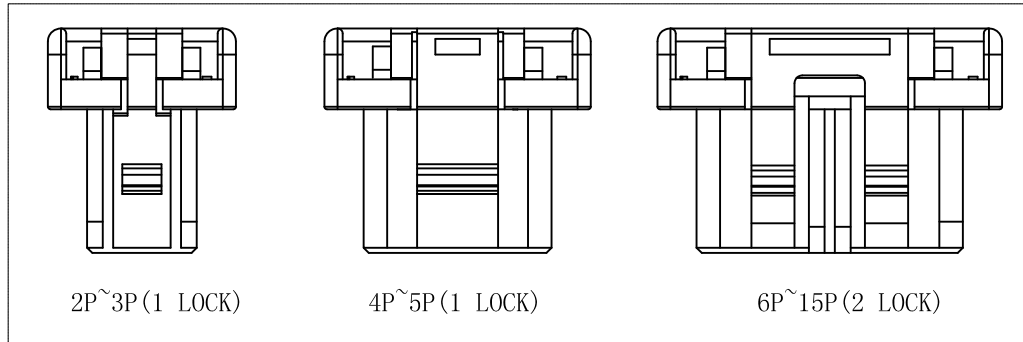

15P	26.80	21.00	23.70
14P	25.30	19.50	22.20
13P	23.80	18.00	20.70
12P	22.30	16.50	19.20
11P	20.80	15.00	17.70
10P	19.30	13.50	16.20
9P	17.80	12.00	14.70
8P	16.30	10.50	13.20
7P	14.80	9.00	11.70
6P	13.30	7.50	10.20
5P	11.80	6.00	8.70
4P	10.30	4.50	7.20
3P	8.80	3.00	5.70
2P	7.30	1.50	4.20
PIN数	A	B	C

F		Uniformly arrange the drawings	Shen	2021.09.17	TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3°	TITLE: MX1.5 Inner buckle Housing	DRAWN: Shen 2021.09.17		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics CO.,LTD		
		Delete Size	Arvin	2020.11.20			CHECKED:	APPROVED:			
LTR	REVISION DESCRIPTION	SIGNATURE	DATE	UNIT:mm	SCALE:1/1	SHEET:1/1	PROJECTION	VER.:A3	DRAWING NO.:1507H101-A-S		