
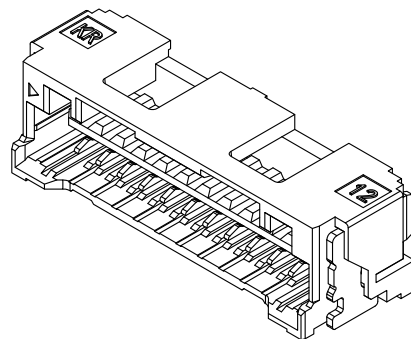


RoHS
COMPLIANT

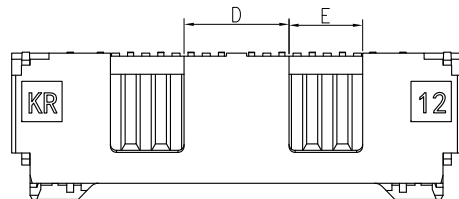

SPECIFICATIONS

1. Current rating: 3A (AWG #24)AC, DC
2. Voltage rating: 100V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance:500MΩ Min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 20mΩ Max.

Material:

Insulator: PA9T UL 94V-0

Pin: Phosphor bronze

A3 Fitting Nail: Brass

Plating: Tin plated over Nickel

Mate with KR1507 series Housing

PART NO:

C1507VS1**11M0101RA




02: 2P

16: 16P

11: PA9T Natural


M01: Matte Tin

R: Reel
P: Bag

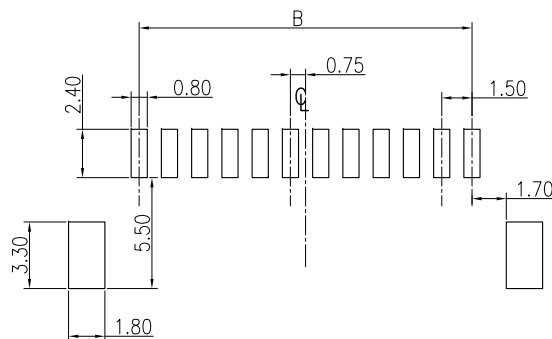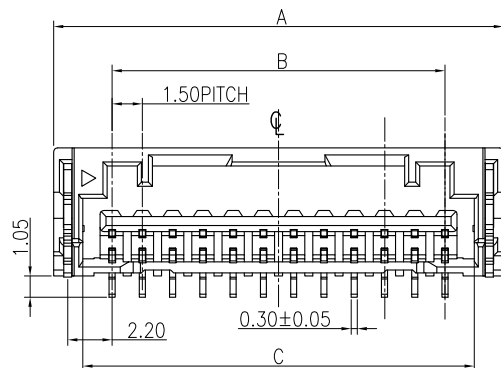

Recommended P.C.B. Layout
Total tolerance:±0.05mm

15P	26.80	21.00	23.90	5.20	3.65
14P	25.30	19.50	22.40	5.20	
13P	23.80	18.00	20.90	5.20	
12P	22.30	16.50	19.40	5.20	
11P	20.80	15.00	17.90	5.20	
10P	19.30	13.50	16.40	3.20	3.25
9P	17.80	12.00	14.90	3.20	
8P	16.30	10.50	13.40	2.50	3.25
7P	14.80	9.00	11.90	2.50	2.50
6P	13.30	7.50	10.40	2.30	2.15
5P	11.80	6.00	8.90	—	3.60
4P	10.30	4.50	7.40	—	3.30
3P	8.80	3.00	5.90	—	2.55
2P	7.30	1.50	4.40	—	1.85
PIN	A	B	C	D	E

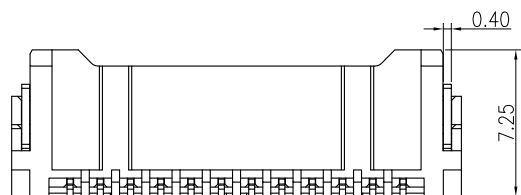

TOLERANCE
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±2°

TITLE:
MX1.5 SMT 180°
INNER BUCKLE WF

DRAWN: Shen 2021.09.08

CHECKED:

APPROVED:

UNIT:mm **SCALE:**1/1

SHEET:1/2

PROJECTION:

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co.,Ltd.

PART NO.:C1507VS1**11M0101RA

REV.:A4 **DRAWING NO.:**1507WVS101-A-S

MARK	REVISION DESCRIPTION	SIGNATURE	DATE
A4	Uniformly arrange the drawings	Shen	2021.09.08
A3	Change the table	Arvin	2020.11.20