
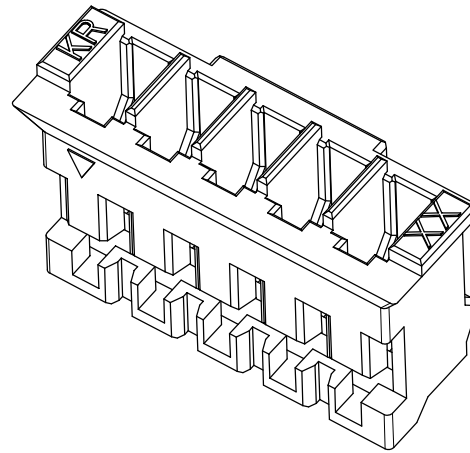




**RoHS**  
COMPLIANT

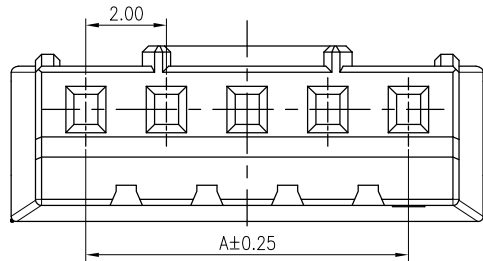

◆ SPECIFICATIONS

- Current rating: 2A AC, DC
- Voltage rating: 100V AC, DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 800V AC/ minute.
- Contact resistance: 20mΩ Max.

Material: Nylon 66 UL 94V-0  
Circuits: 2~16  
Suitable KR2001 Series Terminal  
Mates With KR2001 Series Wafer

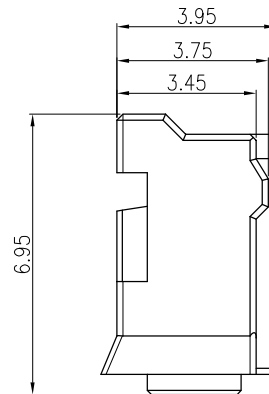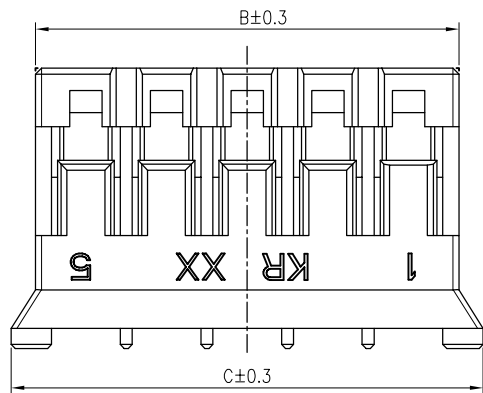

Circuits	Dimensions		
	A	B	C
2	2.00	4.60	5.80
3	4.00	6.60	7.80
4	6.00	8.60	9.80
5	8.00	10.60	11.80
6	10.00	12.60	13.80
7	12.00	14.60	15.80
8	14.00	16.60	17.80
9	16.00	18.60	19.80
10	18.00	20.60	21.80
11	20.00	22.60	23.80
12	22.00	24.60	25.80
13	24.00	26.60	27.80
14	26.00	28.60	29.80
15	28.00	30.60	31.80
16	30.00	32.60	33.80

				TOLERANCE	TITLE:		DRAWN: <i>ZZN 2021.06.28</i>		KONNRA 东莞市康瑞电子有限公司		
				X.X ±0.30	JST PH 2.0_HSG		CHECKED:		DongGuan Konnra Electronics Co.,Ltd.		
				X.XX ±0.20			APPROVED:		PART NO.H200101**0101F		
				X.XXX ±0.10					REV.:A1 DRAWING NO.:2001H01-F-S		
				Angle ±2°	UNIT:mm SCALE:N/A		SHEET:1/1 PROJECTION				
MARK	REVISION DESCRIPTION	SIGNATURE	DATE								
1	2	3	4	5	6	7	8	9			



新版发行

ZZN

2021.06.28