
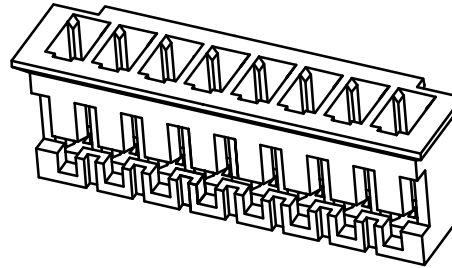


RoHS
COMPLIANT

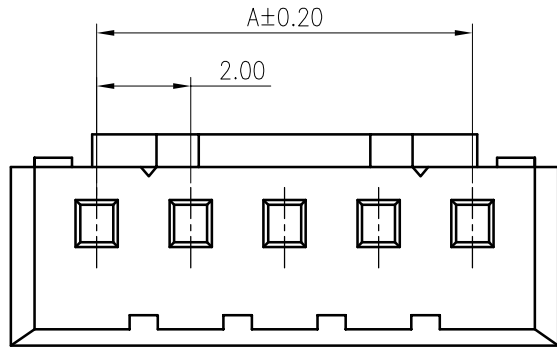

SPECIFICATIONS

1. Current rating: 2A AC, DC
2. Voltage rating: 100V AC, DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 800V AC/ minute.
6. Contact resistance: 20mΩ/ max.

Material: PA66 UL94 V-0
Suitable KR2002 series terminal
Mate with KR2002 series wafer

Ordering Code:



H20020 *** 01 01A

No. of Circuits

102:2,116:16

Insulator Material

17:PA66 Brown V0

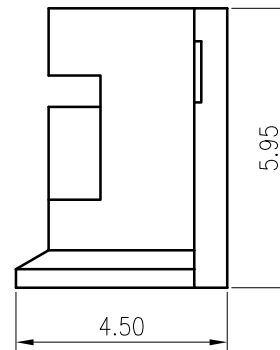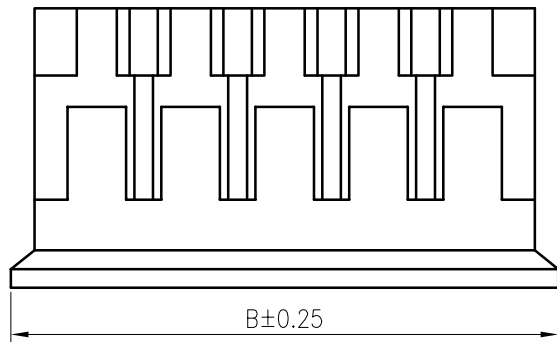

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
02	2.00	5.60	10	18.00	21.60
03	4.00	7.60	11	20.00	23.60
04	6.00	9.60	12	22.00	25.60
05	8.00	11.60	13	24.00	27.60
06	10.00	13.60	14	26.00	29.60
07	12.00	15.60	15	28.00	31.60
08	14.00	17.60	16	30.00	33.60
09	16.00	19.60			

F					TOLERANCE X. X ±0.30 X. XX ±0.20 X. XXX ±0.10 Angle ±2°	TITLE: JAE2.0 Housing	DRAWN: Arvin 2020.05.04		KONNRA 东莞市康瑞电子有限公司		
							CHECKED:		DongGuan Konnra Electronics Co., Ltd.		
		Uniformly arrange the drawings	Arvin	2020.05.04			APPROVED:		PART NO. : H20020***1701A		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE			UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION	REV. : A2
	1	2	3	4	5	6	7	8	9		