

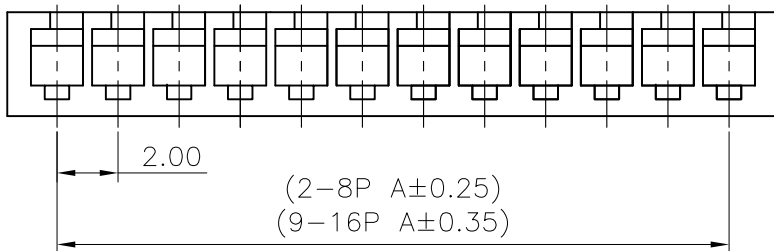



RoHS
COMPLIANT

◆ SPECIFICATIONS

- Current rating: 2A AC, DC
- Voltage rating: 250V AC,DC
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 800V AC/ minute.
- Contact resistance: 20mΩ Max.

Material: Nylon 66 UL 94V-0

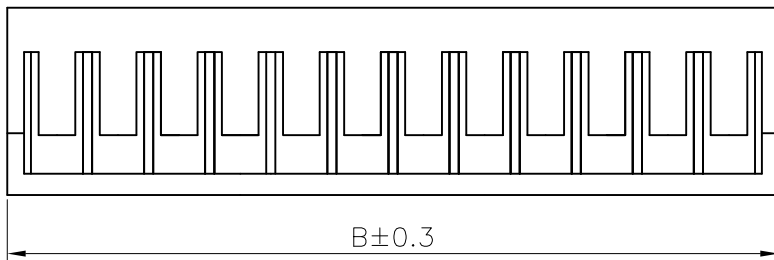

Recommended P.C.Board Layout

PART No.	Dimension mm	
	A	B
H2003V1020101A	2.00	5.20
H2003V1030101A	4.00	7.20
H2003V1040101A	6.00	9.20
H2003V1050101A	8.00	11.20
H2003V1060101A	10.00	13.20
H2003V1070101A	12.00	15.20
H2003V1080101A	14.00	17.20
H2003V1090101A	16.00	19.20
H2003V1100101A	18.00	21.40
H2003V1110101A	20.00	23.40
H2003V1120101A	22.00	25.40
H2003V1130101A	24.00	27.40
H2003V1140101A	26.00	29.40
H2003V1150101A	28.00	31.40
H2003V1160101A	30.00	33.40

MARK	REVISION DESCRIPTION	SIGNATURE	DATE	TOLERANCE	TITLE:	DRAWN:	CHECKED:	APPROVED:	REV.: A3	DRAWING NO.:
A3	Uniformly arrange the drawings	ZSZ	2021.09.06	X.X ±0.30	SAN2.0 180° Housing	ZSZ 2021.09.06			A3	2003HV01-A-S
A2	Change the part number and frame format	TLX	2020.03.28	X.XX ±0.20						
				X.XXX ±0.10						
				Angle ±2°	UNIT:mm	SCALE:N/A	SHEET:1/1	PROJECTION		

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co.,Ltd.

PART NO.: H2003V1**0101A

REV.: A3 DRAWING NO.: 2003HV01-A-S