



- ◆SPECIFICATIONS
- Current rating: 2A AC, DC
 - Voltage rating: 250V AC,DC
 - Temperature range: -25°C ~ +85°C
 - Insulation resistance: 1000M Ω Min.
 - Withstanding voltage: 800V AC/ minute.
 - Contact resistance: 20m Ω Max.


Material: Brass
 Finish: Tin Plated over Nickel
 Applicable wires:
 AWG #24~#28
 Insulation O.D.: 1.4mm Max.
 Suitable:KR2003 series Housing
 Qty/reel:10,000PCS




SECTION A-A

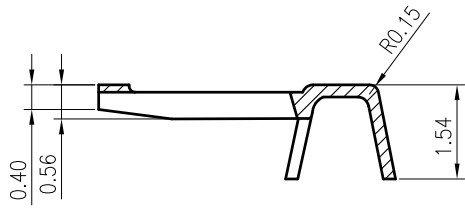

SECTION B-B



SECTION C-C



SECTION D-D

F		Uniformly arrange the drawings	ZSZ	2021.9.08	TOLERANCE X.X ± 0.30 X.XX ± 0.20 X.XXX ± 0.10 Angle $\pm 2^\circ$	TITLE: SAN2.0 90° Terminal		DRAWN: ZSZ 2021.9.08		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.						
		Improve the strength of soldering foot	ZZN	2021.4.29				CHECKED:					APPROVED:		PART NO.: T2003RBT0101D	
	MARK	VERSION RECORD	NAME	DATE				UNIT:mm	SCALE:1:1				SHEET:1/1	PROJECTION	VER.:A5	DRAWING NO.:2003TR01-D-S