

RoHS
COMPLIANT

SPECIFICATIONS

1. Current rating: 2A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20mΩ Max.





Material: PA66 UL94 V-2
Suitable KR2004 series terminal
Mate With KR2004 series wafer

Ordering Code:

H2004M *** 03 01A

No.of Circuits
102:02,116:16

Insulator Material
03:PA66 White V2
21:PA66 Blue V0
46:PA66 Yellow V0

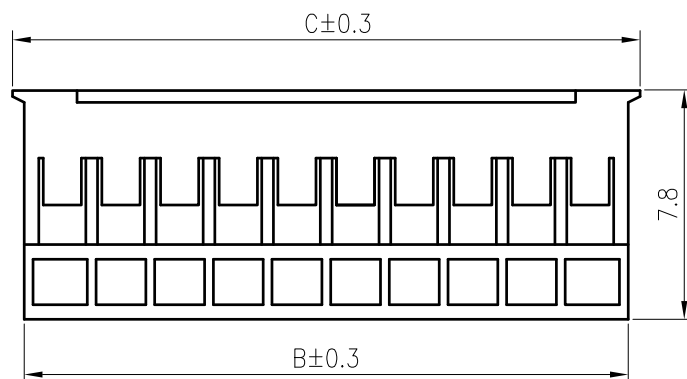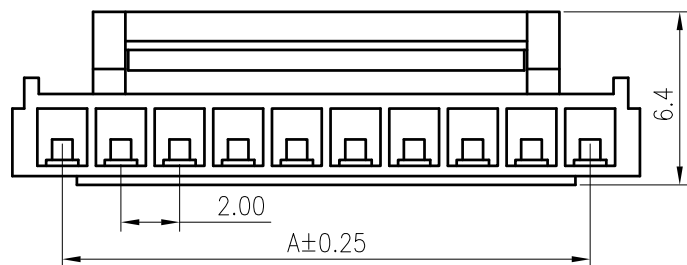

Circuits	Dimensions		
	A	B	C
2	2.00	4.60	5.60
3	4.00	6.60	7.60
4	6.00	8.60	9.60
5	8.00	10.60	11.60
6	10.00	12.60	13.60
7	12.00	14.60	15.60
8	14.00	16.60	17.60
9	16.00	18.60	19.60
10	18.00	20.60	21.60
11	20.00	22.60	23.60
12	22.00	24.60	25.60
13	24.00	26.60	27.60
14	26.00	28.60	29.60
15	28.00	30.60	31.60
16	30.00	32.60	33.60

F		Uniformly arrange the drawings	ZSZ	2021.09.22	TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±2°	TITLE: PH2.0 Have buckle Housing	DRAWN: ZSZ 2021.09.22		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.		
		Add Yellow and Blue Specification	Arvin	2021.09.02			CHECKED:				
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE			UNIT:mm	SCALE:N/A	SHEET:1/1	PROJECTION	REV.:A4
	1	2	3	4	5	6	7	8	9		