

RoHS
COMPLIANT

SPECIFICATIONS

1. Current rating: 2A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20mΩ Max.





Material:

Insulator: LCP UL94 V-0
Contact: Brass
Solder tabs: Phosphor bronze
Plating: Tin Plated over nickel
Mate with KR2004 Series Housing

Ordering Code:

C2004RS *** 13 T01 01RC

No.of Circuits 102:2,116:16
Insulator Material 13:LCP Natural
Plating T01: Tin plated

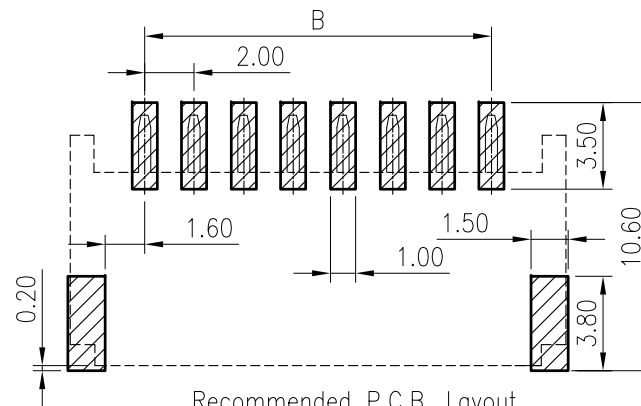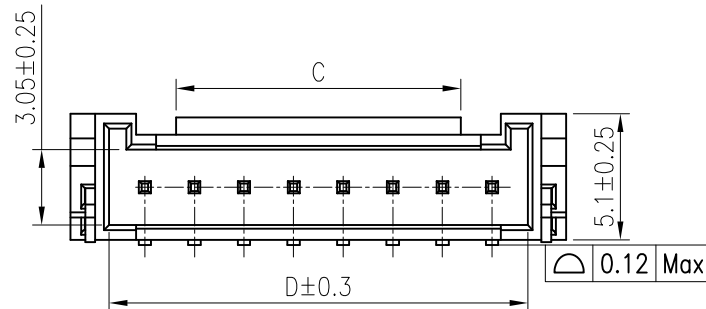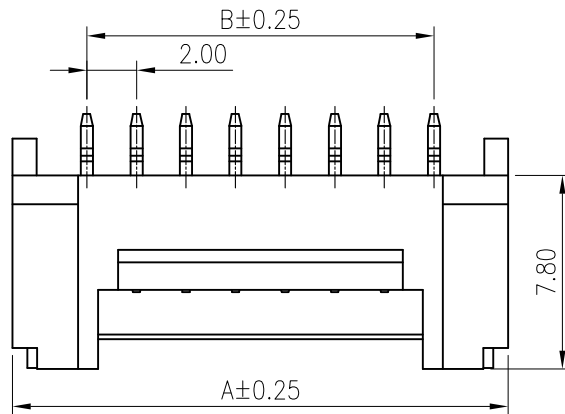

Recommended P.C.B. Layout
Total tolerance:±0.05mm

Circuits	Dimension(mm)			
	A	B	C	D
2	8.00	2.00	2.70	4.75
3	10.00	4.00	3.20	6.75
4	12.00	6.00	3.50	8.90
5	14.00	8.00	5.50	10.90
6	16.00	10.00	7.50	12.90
7	18.00	12.00	9.50	14.90
8	20.00	14.00	11.50	16.90
9	22.00	16.00	13.50	18.90
10	24.00	18.00	15.50	20.90
11	26.00	20.00	15.50	22.90
12	28.00	22.00	15.50	24.90
13	30.00	24.00	15.50	26.90
14	32.00	26.00	15.50	28.90
15	34.00	28.00	15.50	30.90
16	16.80	30.00	15.50	32.90

F					TOLERANCE	TITLE:	DRAWN: ZSZ 2021.09.22	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.			
					X.X ±0.30	PH2.0 Have buckle	CHECKED:				
		Uniformly arrange the drawings	ZSZ	2021.09.22	X.XX ±0.20	SMT 90° Wafer	APPROVED:	PART NO.:C2004RS***13T0101RC			
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE	X.XXX ±0.10	Angle ±2°	UNIT:mm	SCALE:N/A	SHEET:1/1	PROJECTION	REV.:A1