

RoHS
COMPLIANT

SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC, DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20mΩ/ max.

Material:

Insulator: PA66 UL 94V-0

Contact: Brass

Plating: Tin plated over Nickel

Ordering Code:

H200601**020*A

102=2P





103=3P

.....

00:Halogen free

01:Conventional products

02:PA66 UL94 V-0 black

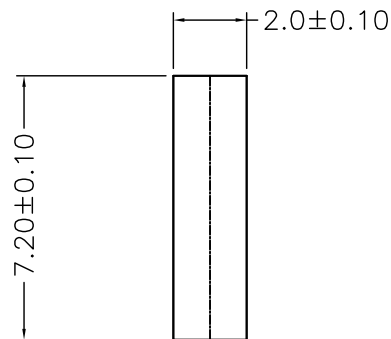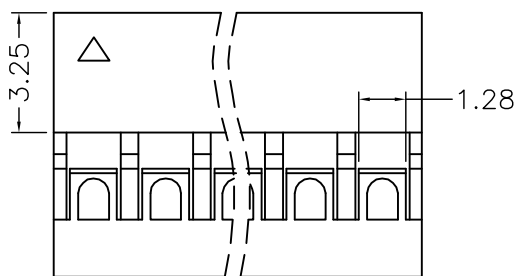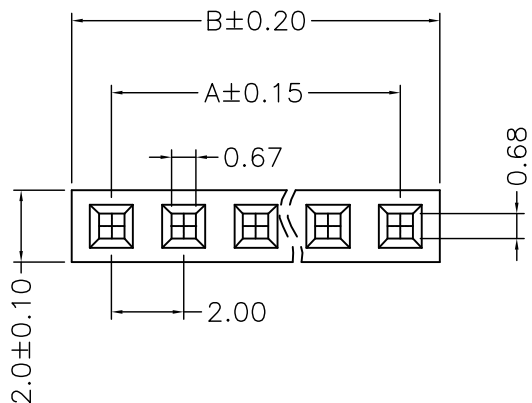

PIN位	A	B	PIN位	A	B
2PIN	2.00	4.40	14PIN	26.00	28.40
3PIN	4.00	6.40	15PIN	28.00	30.40
4PIN	6.00	8.40	16PIN	30.00	32.40
5PIN	8.00	10.40	17PIN	32.00	34.40
6PIN	10.00	12.40	18PIN	34.00	36.40
7PIN	12.00	14.40	19PIN	36.00	38.40
8PIN	14.00	16.40	20PIN	38.00	40.40
9PIN	16.00	18.40	21PIN	40.00	42.40
10PIN	18.00	20.40	22PIN	42.00	44.40
11PIN	20.00	22.40	23PIN	44.00	46.40
12PIN	22.00	24.40	24PIN	46.00	48.40
13PIN	24.00	26.40	25PIN	48.00	50.40



Update Item No. Description

ZSZ 2022.11.03

Change the part number and frame format

TLX 2020.04.02

MARK REVISION DESCRIPTION SIGNATURE DATE

TOLERANCE
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±2°

TITLE: DP2.0 Housing
UNIT:mm SCALE:N/A

DRAWN: TLX 2020.04.02
CHECKED:
APPROVED:
SHEET: 1/1 PROJECTION

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co.,Ltd.
PART NO.: H200601**020*A
REV.: A3 DRAWING NO.: 2006H101-A-S