
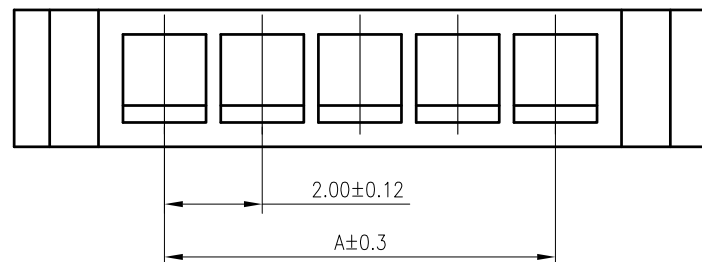
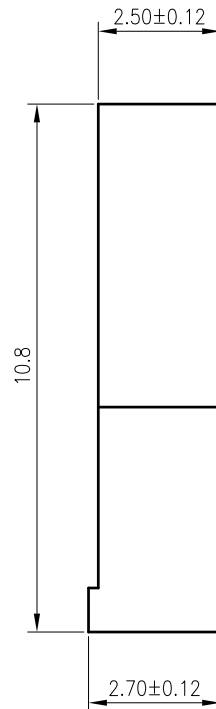


**RoHS**  
COMPLIANT

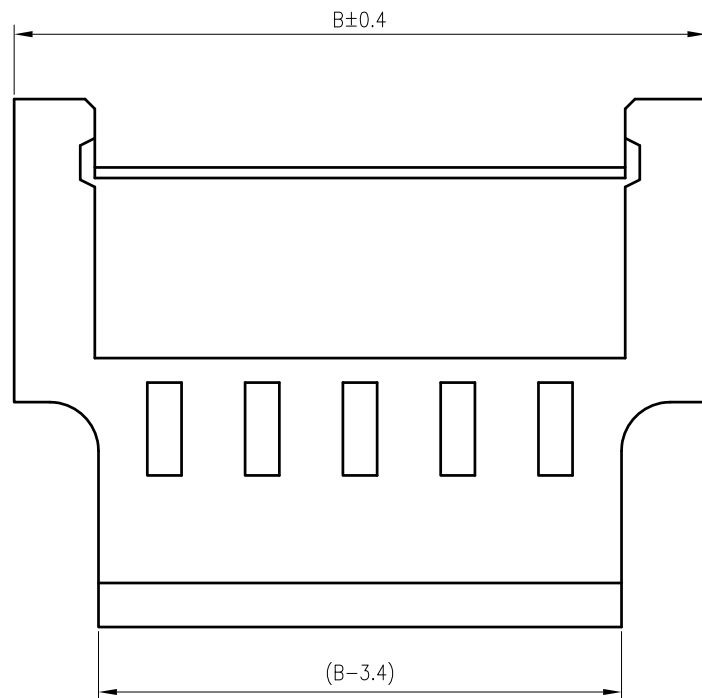

**SPECIFICATIONS**

1. Current rating: 2A AC, DC
2. Voltage rating: 125V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 20m Ω Max.

Material: PA66 UL 94V-0  
 Suitable KR2007 series terminal  
 Mate with KR2007 series housing  
 Ordering Code:

H2007F \*\*\* 01 01C

No.of Circuits —┐  
 102:2,116:16 —┘  
 Insulator Material —┐  
 01:PA66 White 94V-0 —┘

Circuits	Dimension		Circuits	Dimension	
	A	B		A	B
2	2.00	8.00	10	18.00	24.00
3	4.00	10.00	11	20.00	26.00
4	6.00	12.00	12	22.00	28.00
5	8.00	14.00	13	24.00	30.00
6	10.00	16.00	14	26.00	32.00
7	12.00	18.00	15	28.00	34.00
8	14.00	20.00	16	30.00	36.00
9	16.00	22.00			

F	MARK		REVISION	DESCRIPTION	SIGNATURE	DATE	TOLERANCE	TITLE:	DRAWN: ZSZ 2021.09.24	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd. PART NO.: H2007F***0101C REV.: A3 DRAWING NO.: 2007HF101-C-S
	△3		1	Uniformly arrange the drawings	ZSZ	2021.09.24	X.X ±0.30	MX2.0 Air docking	CHECKED:	
	△2		2	Change the part number and frame format	LJT	2020.04.29	X.XX ±0.20	Male Housing	APPROVED:	
			3				X.XXX ±0.10		SHEET: 1/1 PROJECTION	
		4				Angle ±2°	UNIT:mm	SCALE:N/A		