
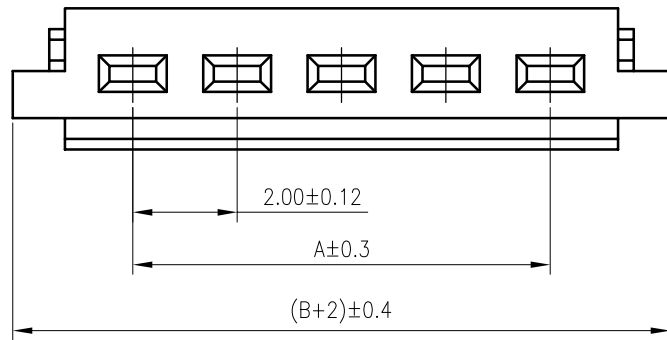
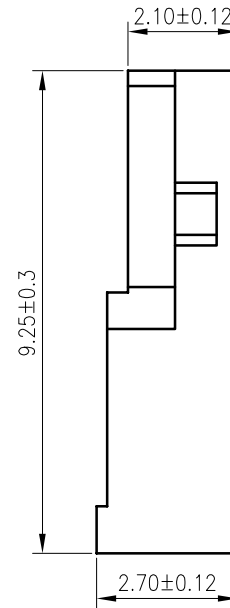


RoHS
COMPLIANT

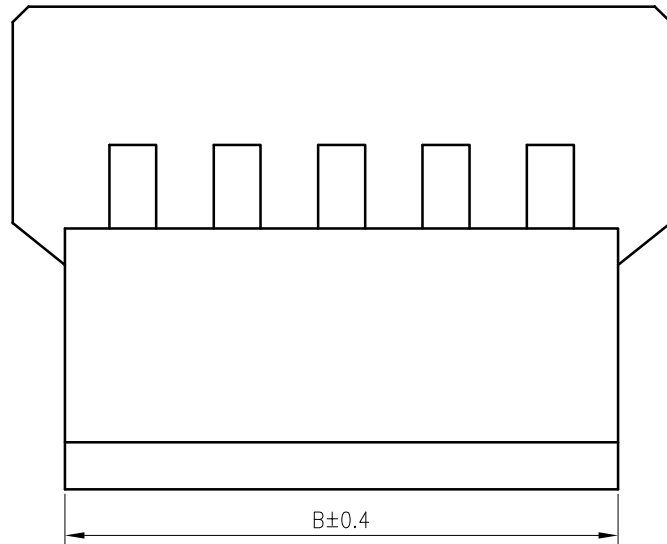

SPECIFICATIONS

1. Current rating: 2A AC, DC
2. Voltage rating: 125V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 20mΩ Max.

Material: PA66 UL 94V-0
 Suitable KR2007 series terminal
 Mate with KR2007 series housing
 Ordering Code:

H2007M *** 01 01C

No.of Circuits

102:2,116:16

Insulator Material

01:PA66 White

Circuits	Dimension		Circuits	Dimension	
	A	B		A	B
2	2.00	4.60	10	18.00	20.60
3	4.00	6.60	11	20.00	22.60
4	6.00	8.60	12	22.00	24.60
5	8.00	10.60	13	24.00	26.60
6	10.00	12.60	14	26.00	28.60
7	12.00	14.60	15	28.00	30.60
8	14.00	16.60	16	30.00	32.60
9	16.00	18.60			

F		Uniformly arrange the drawings	ZSZ	2021.09.24	TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±2°	TITLE: MK2.0 Air docking Female Housing		DRAWN: ZSZ 2021.09.24		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd.		
		Change the part number and frame format	LJT	2020.04.29		CHECKED:		APPROVED:				
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE		UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION	REV.: A3	DRAWING NO.: 2007HM01-C-S	
1	2	3	4	5	6	7	8	9				