

RoHS
COMPLIANT

SPECIFICATIONS







1. Current rating: 3A AC, DC
2. Voltage rating: 125V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20mΩ Max.

Material: PA66 UL 94V-0
Suitable KR2008 series terminal
Mate with KR2008 series wafer

Ordering Code:

H20080 *** 01 01B

No. of Circuits ———
102:2,115:15
Insulator Material ———
01:PA66 White V0

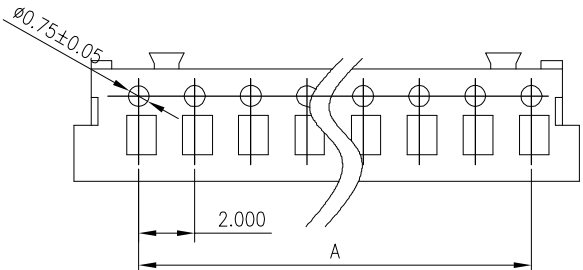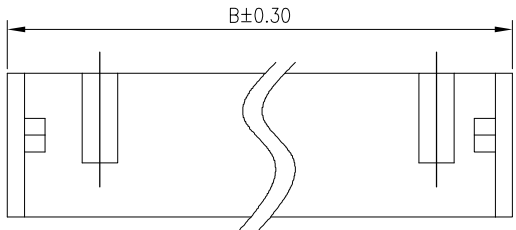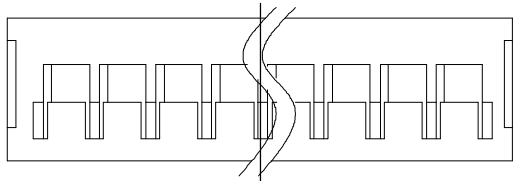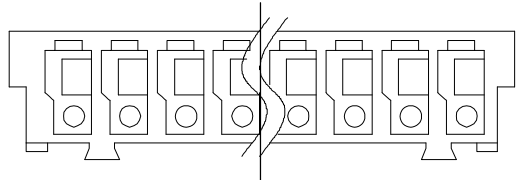

Circuits	Dimensions	
	A	B
2	2.00	6.00
3	4.00	8.00
4	6.00	10.00
5	8.00	12.00
6	10.00	14.00
7	12.00	16.00
8	14.00	18.00
9	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00

F					TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±2°	TITLE: AMP 2.0 Housing	DRAWN: Liujiangtian 2020.05.04		KONNRA 东莞市康瑞电子有限公司		
							CHECKED:		Dongguan Konnra Electronics Co., Ltd.		
		Change the part number and frame format	LJT	2020.05.04			APPROVED:		PART NO. : H20080***0101B		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE			UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION	REV. : A2
	1	2	3	4	5	6	7	8	9		