
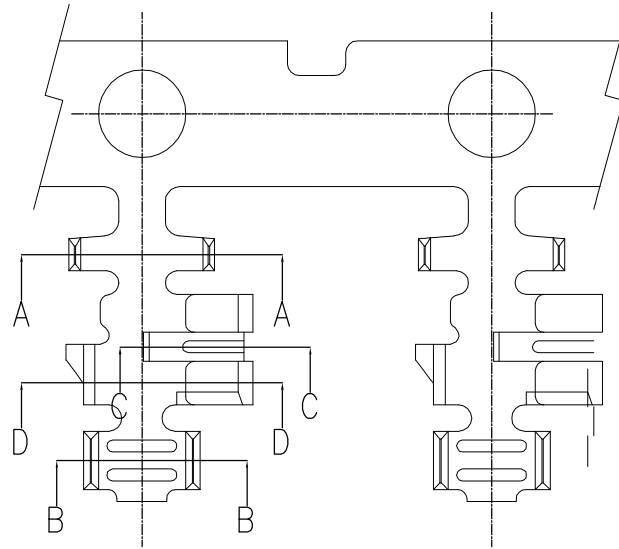


RoHS
COMPLIANT

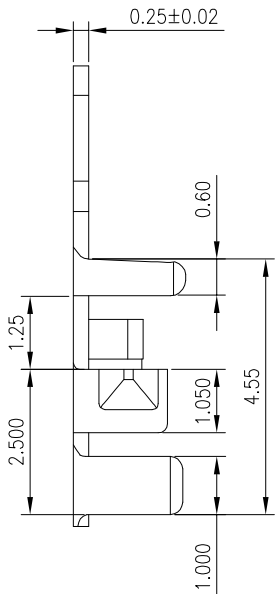

SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 125V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20mΩ Max.

Applicable Wires:

AWG#22~#26


Insulation O.D. : 1.50mm MAX

Material: Phosphor Bronze


Plating: Tin-Plated over nickel

Suitable KR2008 series housing


Q'ty/reel: 10,000 PCS




SECTION A-A



SECTION B-B



SECTION C-C



SECTION D-D

F					TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±2°	TITLE: AMP2.0 Terminal	DRAWN: Liujiangtian 2020.05.04		KONNRA 东莞市康瑞电子有限公司	
							CHECKED:		DongGuan Konnra Electronics Co., Ltd.	
		Change the part number and frame format	LJT	2020.05.04			APPROVED:		PART NO. : T20080P***01B	
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE			UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION