

RoHS
COMPLIANT

SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 650V AC/ minute.
6. Contact resistance: 30mΩ Max.

Material:

Insulator: PA6T UL 94V-0
Contact: Brass
Plating: Gold plated over Nickel
Mate with KR2009 series Housing





Ordering Code:

C2009RD *** 10G0101RA

No. of Circuits

102:2,115:15

Circuits	Dimensions	
	A	A
2	2.00	6.00
3	4.00	8.00
4	6.00	10.00
5	8.00	12.00
6	10.00	14.00
7	12.00	16.00
8	14.00	18.00
9	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00

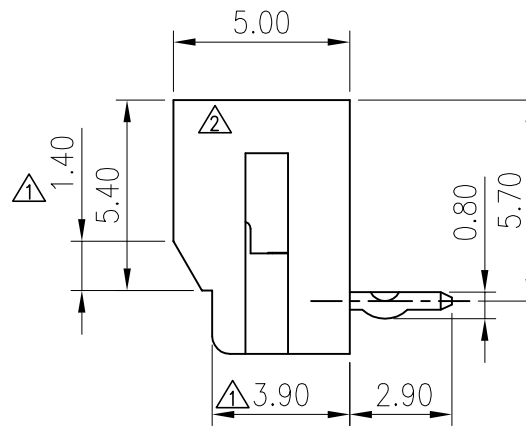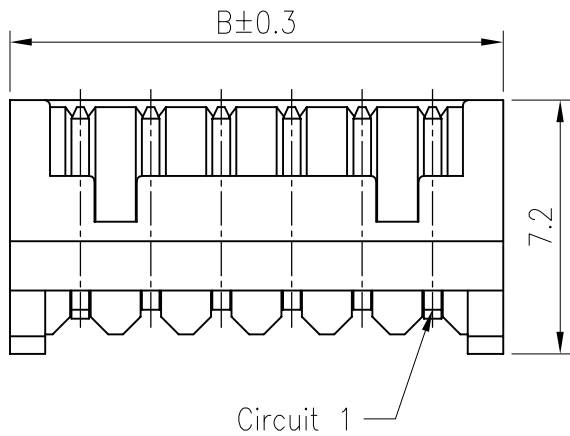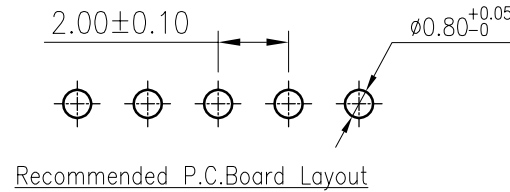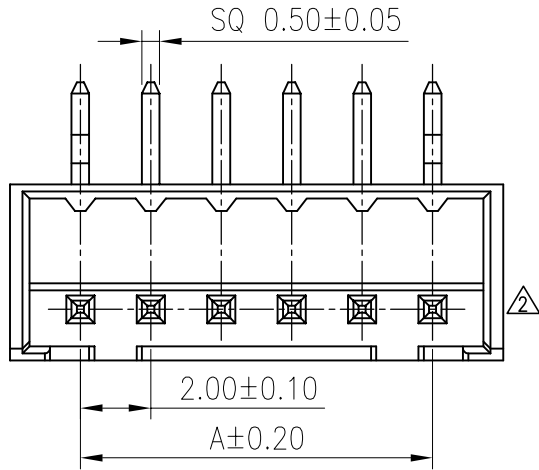

F	△4			TOLERANCE X. X ±0.30 X. XX ±0.20 X. XXX ±0.10 Angle ±2°	TITLE: DF3 DIP 90° Wafer	DRAWN: Liujiangtian 2020.5.25		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd. PART NO.: C2009RD***10T0101RA REV.: A2 DRAWING NO.: 2009WRD101-A-S			
	△3					CHECKED:					
	△2	Change the part number and frame format	LJT			2020.05.25	APPROVED:				
	MARK	REVISION DESCRIPTION	SIGNATURE			DATE	UNIT: mm				SCALE: N/A
	1	2	3	4	5	6	7	8	9		