

RoHS
COMPLIANT



SPECIFICATIONS




1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 650V AC/ minute.
6. Contact resistance: 30mΩ Max.

Material: PA66 UL 94V-0
Suitable KR2009 series terminal
Mate with KR2009 series wafer

Ordering Code:

H20090 *** 02 01A

No. of Circuits 
102:2,115:15
Insulator Material 
01:PA66 Black V0

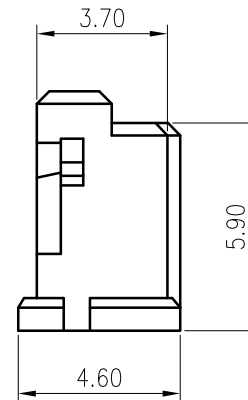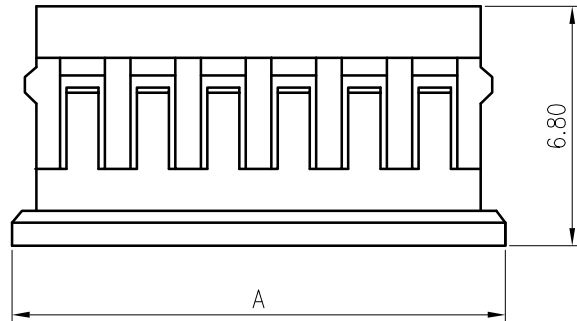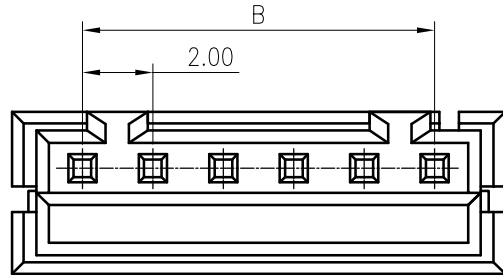


Circuits	Dimension	
	A	B
2	6.00	2.00
3	8.00	4.00
4	10.00	6.00
5	12.00	8.00
6	14.00	10.00
7	16.00	12.00
8	18.00	14.00
9	20.00	16.00
10	22.00	18.00
11	24.00	20.00
12	26.00	22.00
13	28.00	24.00
14	30.00	26.00
15	32.00	28.00

MARK	REVISION	DESCRIPTION	SIGNATURE	DATE
A4				
A3				
A2		Change the part number and frame format	LJT	2020.05.25

TOLERANCE
X. X ±0.30
X. XX ±0.20
X. XXX ±0.10
Angle ±2°

TITLE:
DF3 Housing
UNIT: mm
SCALE: N/A

DRAWN: Liujiangtian 2020.5.25
CHECKED:
APPROVED:
SHEET: 1/1
PROJECTION 

KONNRA 东莞市康瑞电子有限公司	
DongGuan Konnra Electronics Co., Ltd.	
PART NO. : H20090***0201A	
REV. : A2	DRAWING NO. : 2009H101-A-S

