
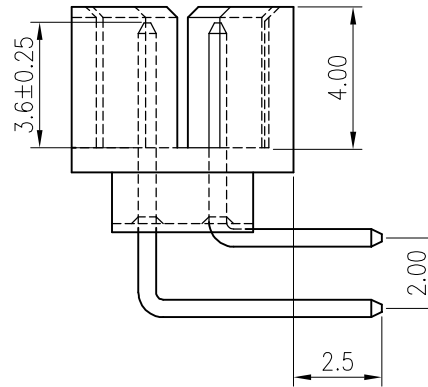
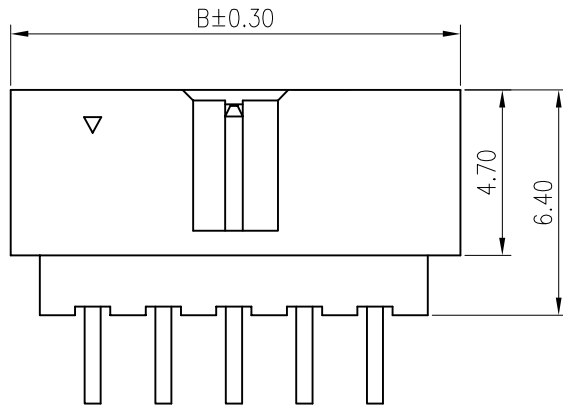
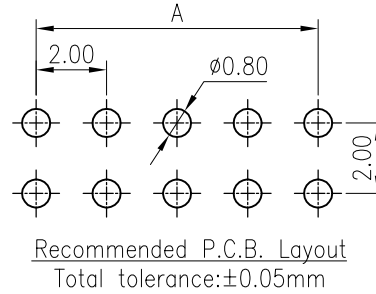


RoHS
COMPLIANT

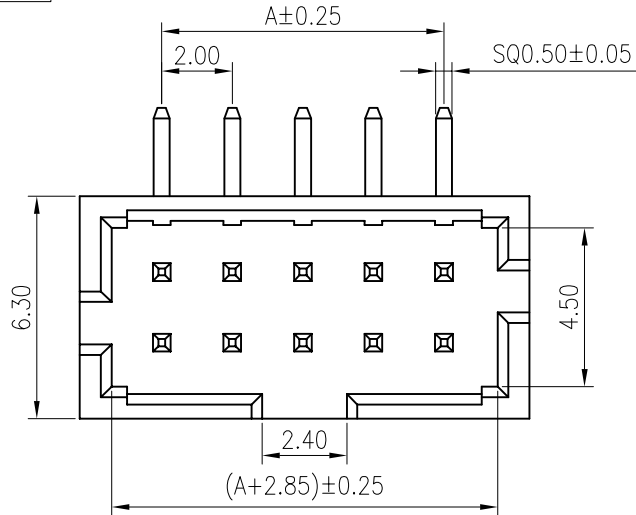

SPECIFICATIONS

1. Current rating: 1.5A AC, DC
2. Voltage rating: 250V AC, DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 20mΩ/ max.

Material:

Insulator: LCP UL 94V-0
Contact: Brass
Plating: Gold flash over Nickel
Mate with KR2006 series double row housing

Ordering Code:

C2013RD *** 14 G01 01BB
No. of Circuits }
203: 2x3, 225: 2x25 } Plating
Insulator Material } G01: Gold flash
01: LCP Black

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2x3	4.00	8.65	2x13	24.00	28.65
2x4	6.00	10.65	2x14	26.00	30.65
2x5	8.00	12.65	2x15	28.00	32.65
2x6	10.00	14.65	2x16	30.00	34.65
2x7	12.00	16.65	2x17	32.00	36.65
2x8	14.00	18.65	2x18	34.00	38.65
2x9	16.00	20.65	2x19	36.00	40.65
2x10	18.00	22.65	2x20	38.00	42.65
2x11	20.00	24.65	2x25	48.00	52.65
2x12	22.00	26.65			



MARK

1

2

3

4

5

6

7

8

9

TOLERANCE

X. X ±0.30
X. XX ±0.20
X. XXX ±0.10
Angle ±2°

TITLE:
DP2.0 DIP 90°
Box Header

UNIT: mm SCALE: N/A

DRAWN: Arvin 2020.04.03

CHECKED:

APPROVED:

SHEET: 1/1

PROJECTION

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co., Ltd.

PART NO.: C2013RDxxx14G0101BB

REV.: A1 DRAWING NO.: 2013WRD201-B-S