
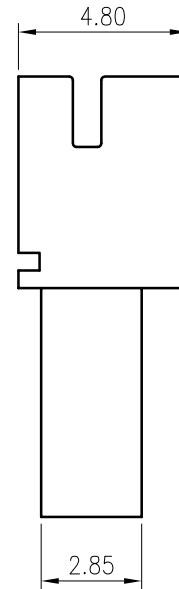
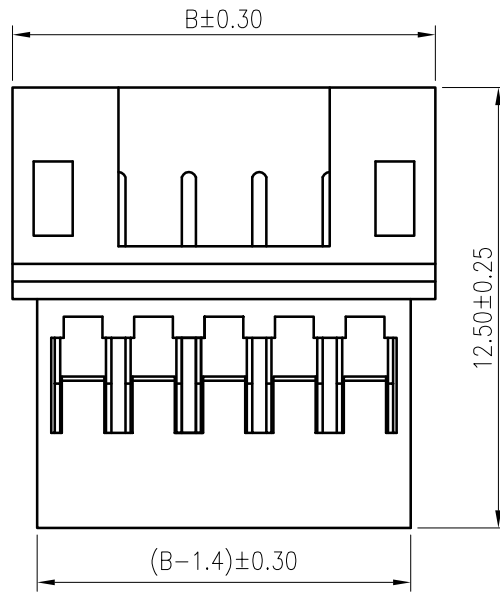


RoHS
COMPLIANT

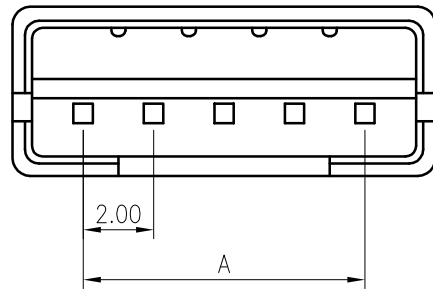

SPECIFICATIONS

1. Current rating: 2A AC, DC
2. Voltage rating: 100V AC, DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 800V AC/ minute.
6. Contact resistance: 20mΩ/ max.

Material: PA66 UL94 V-0
Suitable KR2015 series terminal
Mate with KR2001 series housing

Ordering Code:

H20150 *** 01 01A

No. of Circuits
102:2, 116:16

Insulator Material
01: PA66 White V0
02: PA66 Black V0



Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2	2.00	6.00	10	18.00	22.00
3	4.00	8.00	11	20.00	24.00
4	6.00	10.00	12	22.00	26.00
5	8.00	12.00	13	24.00	28.00
6	10.00	14.00	14	26.00	30.00
7	12.00	16.00	15	28.00	32.00
8	14.00	18.00	16	30.00	34.00
9	16.00	20.00			

	Add Black Specification	Arvin	2021.03.31
MARK	REVISION DESCRIPTION	SIGNATURE	DATE

TOLERANCE
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±2°

TITLE:
PH2.0 Air docking
Housing

UNIT: mm SCALE: N/A

DRAWN: Arvin 2020.04.28

CHECKED:

APPROVED:

SHEET: 1/1 PROJECTION

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co., Ltd.

PART NO.: H20150*****01A

REV.: A2 DRAWING NO.: 2015H101-A-S