

RoHS
COMPLIANT



SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20mΩ Max.

Material: Nylon 66 UL 94V-0
Suitable KR1258 series terminal
Mate with KR1258 series wafer
Ordering Code:

H25000 *** 22 01B

No. of Circuits 102:2,116:16
Insulator Material 22:PA66 Beige V0

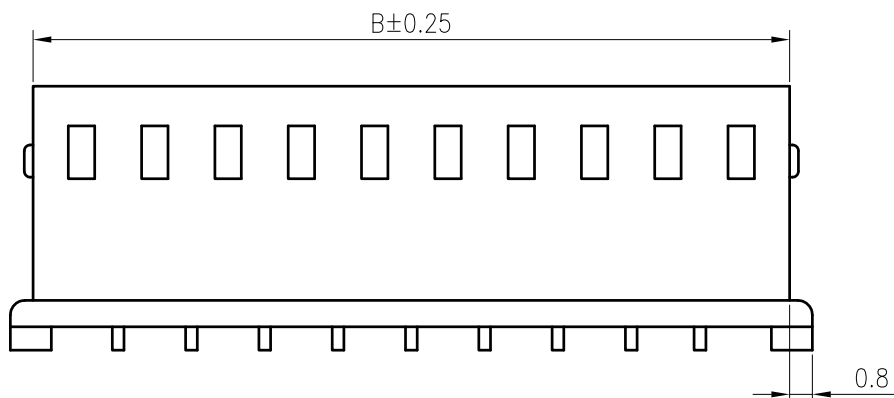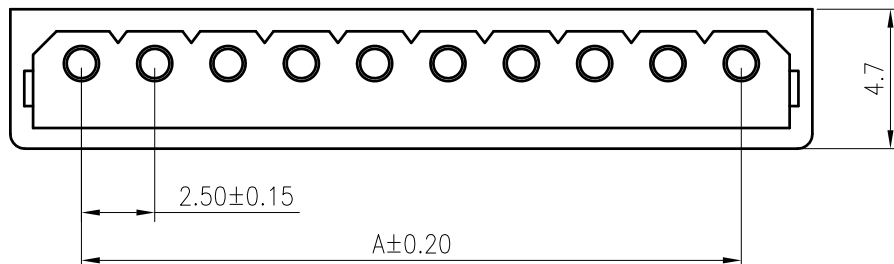

Circuits	Dimensions	
	A	B
2	2.50	5.80
3	5.00	8.30
4	7.50	10.80
5	10.00	13.30
6	12.50	15.80
7	15.00	18.30
8	17.50	20.80
9	20.00	23.30
10	22.50	25.80
11	25.00	28.30
12	27.50	30.80
13	30.00	33.30
14	32.50	35.80
15	35.00	38.30
16	37.50	40.80

				TOLERANCE	TITLE: MX2.5 Housing		DRAWN: Shen 2022.01.08		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.				
				X.X ±0.30			CHECKED:		PART NO.: H25000***2201B				
				X.XX ±0.20			APPROVED:						
				X.XXX ±0.10			UNIT:mm		SCALE:N/A		SHEET:1/1		PROJECTION
MARK	REVISION DESCRIPTION		SIGNATURE	DATE	Angle ±2°								



Uniformly arrange the drawings
Shen 2022.01.08