


RoHS
COMPLIANT

SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 800V AC/ minute.
6. Contact resistance: 20mΩ Max.

Material: Nylon66 UL94 V-0
 Suitable KR2504 series terminal
 Mate with KR2504 series wafer
 Ordering Code:

 H25040 *** 01 01A

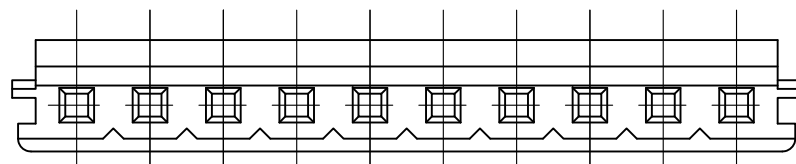

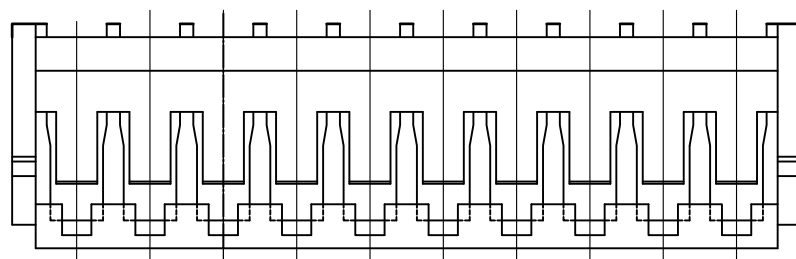
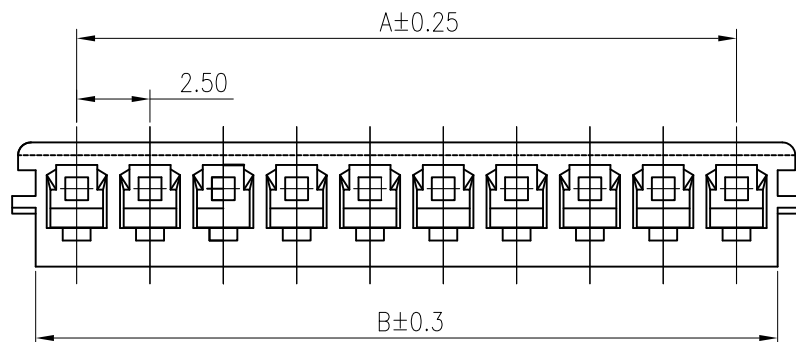
No.of Circuits



102:2,116:16

Insulator Material

01:PA66 White V0

Circuits	Dimension	
	A	B
2	2.50	5.40
3	5.00	7.90
4	7.50	10.40
5	10.00	12.90
6	12.50	15.40
7	15.00	17.90
8	17.50	20.40
9	20.00	22.90
10	22.50	25.40
11	25.00	27.90
12	27.50	30.40
13	30.00	32.90
14	32.50	35.40
15	35.00	37.90
16	37.50	40.40



				TOLERANCE	TITLE: EH2.5 Housing		DRAWN: Shen 2022.01.13		KONNRA 东莞市康瑞电子有限公司	
				X.X ±0.30			CHECKED:		DongGuan Konnra Electronics Co.,Ltd.	
				X.XX ±0.20			APPROVED:		PART NO.: H25040***0101A	
				X.XXX ±0.10			SHEET: 1/1		REV.: A3	
				Angle ±2°	UNIT:mm		SCALE:N/A		DRAWING NO.: 2504H101-A-S	
	Uniformly arrange the drawings	Shen	2022.01.13			PROJECTION 				
MARK	REVISION DESCRIPTION	SIGNATURE	DATE							