
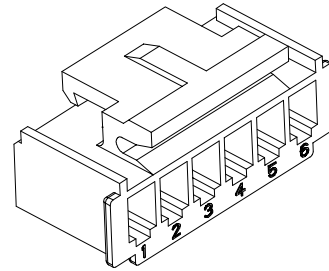
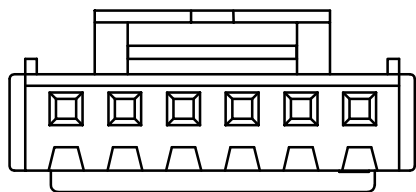
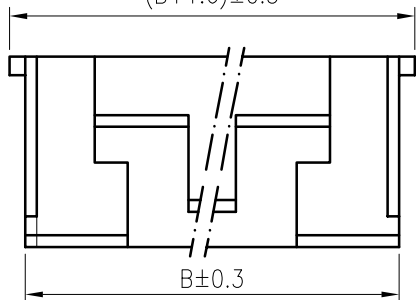
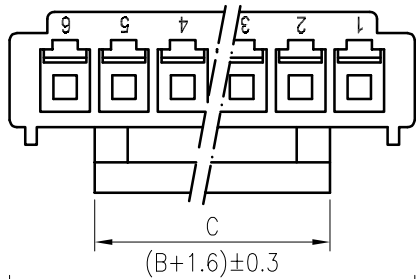


**RoHS**  
COMPLIANT

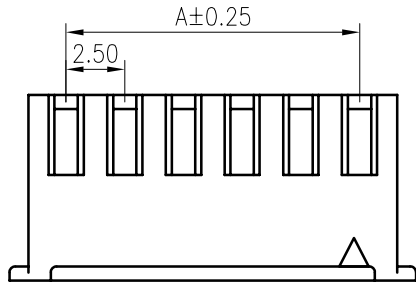

**SPECIFICATIONS**

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC, DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20mΩ/ max.

Material: PA66 UL94V-0  
Suitable KR2501 series terminal  
Mate with KR2511 series wafer

Ordering Code:

H25110 102 01 01A

No. of Circuits

102: 2, 116: 16

Insulator Material

01: PA66 White V0

Circuits	Dimensions		
	A	B	C
2	2.50	5.70	4.70
3	5.00	8.20	5.60
4	7.50	10.70	8.10
5	10.00	13.20	9.35
6	12.50	15.70	10.60
7	15.00	18.20	10.60
8	17.50	20.70	11.85
9	20.00	23.20	13.10
10	22.50	25.70	14.35
11	25.00	28.20	14.35
12	27.50	30.70	15.60
13	30.00	33.20	16.85
14	32.50	35.70	18.10
15	35.00	38.20	19.35
16	37.50	40.70	19.35



MARK

REVISION DESCRIPTION

SIGNATURE

DATE

TOLERANCE

X. X ±0.30

X. XX ±0.20

X. XXX ±0.10

Angle ±2°

TITLE:

XHQ2.5 Housing

UNIT: mm

SCALE: N/A

DRAWN: Arvin 2021.03.13

CHECKED:

APPROVED:

SHEET: 1/1

PROJECTION

**KONNRA** 东莞市康瑞电子有限公司

DongGuan Konnra Electronics CO., LTD

PART NO.: H25110\*\*\*0101A

VER.: A1

DRAWING NO.: 2511H101-A-S