

RoHS
COMPLIANT

SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 1500V AC/ minute.
6. Contact resistance: 20mΩ Max.

Material: Nylon PBT UL 94V-0
Suitable KR2545 series terminal
Mate with KR2545 series wafer

Ordering Code:

H25450 *** 05 01A





No. of Circuits

202:2*2,232:2*32

Insulator Material

05:PBT Black V0

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2x2	2.54	9.48	2x18	43.18	50.12
2x3	5.08	12.02	2x19	45.72	52.66
2x4	7.62	14.56	2x20	48.26	55.20
2x5	10.16	17.10	2x21	50.80	57.74
2x6	12.70	19.64	2x22	53.34	60.28
2x7	15.24	22.18	2x23	55.88	62.82
2x8	17.78	24.72	2x24	58.42	65.36
2x9	20.32	27.26	2x25	60.96	67.90
2x10	22.86	29.80	2x26	63.50	70.44
2x11	25.40	32.34	2x27	66.04	72.98
2x12	27.94	34.88	2x28	68.58	75.52
2x13	30.48	37.42	2x29	71.12	78.06
2x14	33.02	39.96	2x30	73.66	80.60
2x15	35.56	42.50	2x31	76.20	83.14
2x16	38.10	45.04	2x32	78.74	85.68
2x17	40.64	47.58			

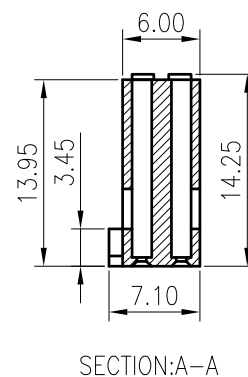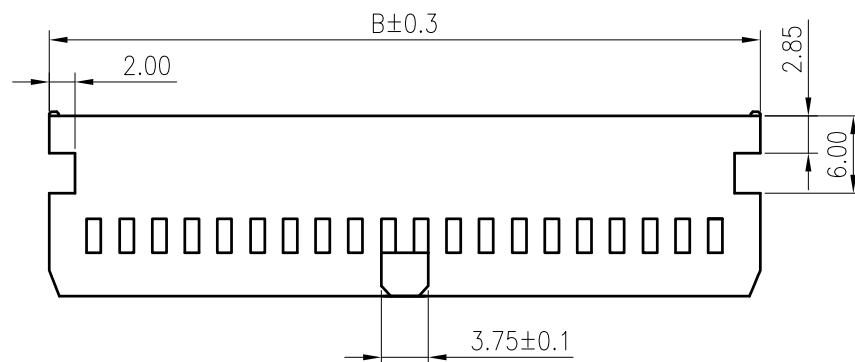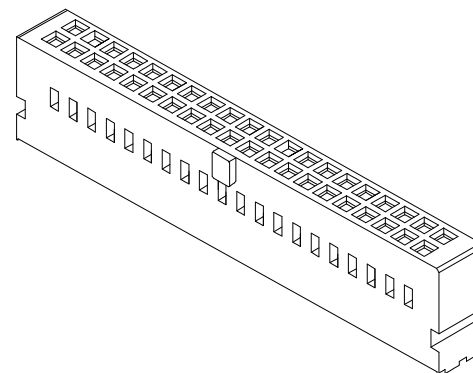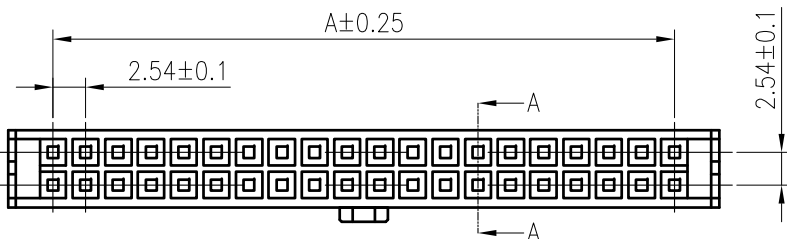

F					TOLERANCE	TITLE:	DRAWN: Liujingtian 2020.5.19	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd. PART NO.: H25450***0501A		
					X.X ±0.30	HRS 2.54 Housing	CHECKED:			
		Uniformly arrange the drawings	LJT	2020.05.19	X.XX ±0.20		APPROVED:			
MARK	REVISION DESCRIPTION	SIGNATURE	DATE	X.XXX ±0.10	UNIT:mm	SCALE:N/A	SHEET:1/1	PROJECTION	REV.:A2	DRAWING NO.:2545H201-A-S
	1	2	3	4	5	6	7	8	9	