

RoHS
COMPLIANT

SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20mΩ Max.

Material: PBT UL 94V-0
Suitable KR2546 series terminal
Mate with KR2546 series wafer





Ordering Code:

H25460 *** 05 01A

No.of Circuits

202:2*2,232:2*32

Insulator Material
05:PBT Black V0

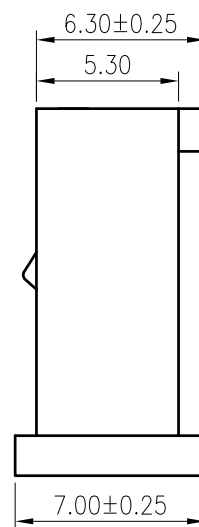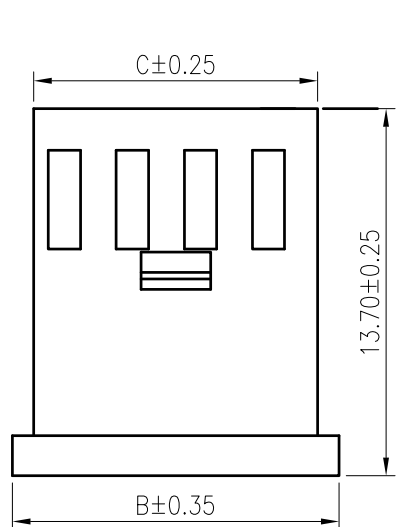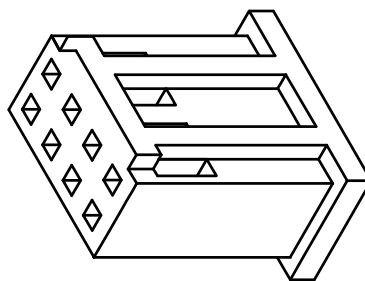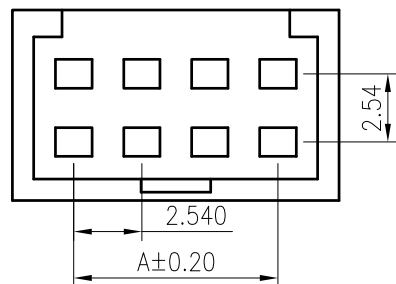

Circuits	Dimensions			Circuits	Dimensions		
	A	B	C		A	B	C
2x2	2.54	7.12	5.52	2x13	30.48	35.06	33.46
2x3	5.08	9.66	8.06	2x14	33.02	37.60	36.00
2x4	7.62	12.20	10.60	2x15	35.56	40.14	38.54
2x5	10.16	14.74	13.14	2x16	38.10	42.68	41.08
2x6	12.70	17.28	15.70	2x17	40.64	45.22	43.62
2x7	15.24	19.82	18.22	2x18	43.18	47.76	46.16
2x8	17.78	22.36	20.76	2x19	45.72	50.30	48.70
2x9	20.32	24.90	23.30	2x20	48.26	52.84	51.24
2x10	22.86	27.44	25.84	2x21	50.80	55.38	53.78
2x11	25.40	29.98	28.38	2x32	78.74	83.32	81.72
2x12	27.94	32.52	30.92				



Uniformly arrange the drawings

LJT

2020.05.20

TOLERANCE
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±2°

TITLE:
2.54 Pitch Dual Row
Housing

DRAWN: Liujingtian 2020.5.20

CHECKED:

APPROVED:

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co.,Ltd.

PART NO.: H25460***0501A

MARK

REVISION DESCRIPTION

SIGNATURE

DATE

UNIT:mm

SCALE:N/A

SHEET:1/1

PROJECTION

REV.:A2

DRAWING NO.:2546H201-A-S

1

2

3

4

5

6

7

8

9