

RoHS
COMPLIANT

SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20mΩ Max.

Applicable Wires:

AWG#22~#26




Insulation O.D. : 1.55mm MAX

Material: Phosphor Bronze


Plating: Tin plated over nickel

Suitable KR2546 series housing


Q'ty/reel: 15,000 PCS

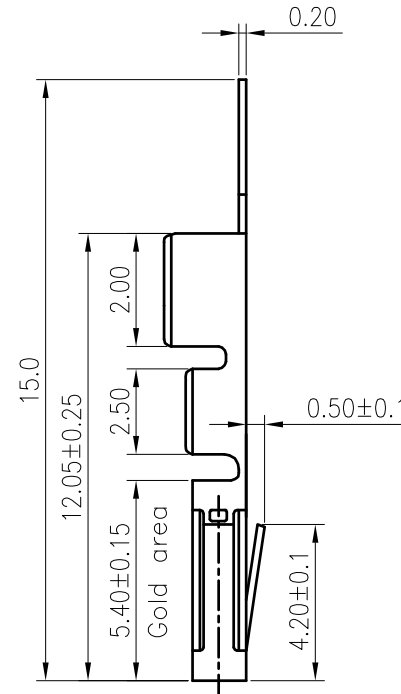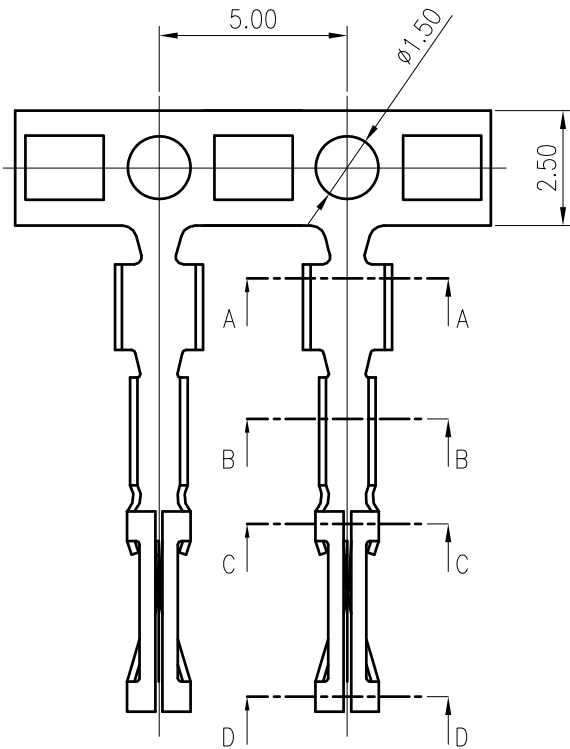


SECTION A-A



SECTION B-B



SECTION C-C

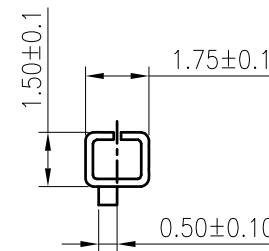

SECTION D-D



MARK	REVISION DESCRIPTION	SIGNATURE	DATE
1		LJT	2020.05.20

TOLERANCE
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±2°

TITLE:
**2.54 Pitch Terminal
Single Row**

UNIT:mm SCALE:N/A

DRAWN: Liujingtian 2020.5.20
CHECKED:
APPROVED:
SHEET: 1/1

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co.,Ltd.
PART NO.: T2546FPT0101A

REV.: A2 DRAWING NO.: 2546T101-A-S

