
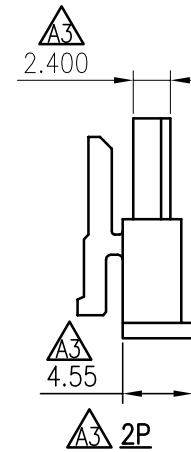

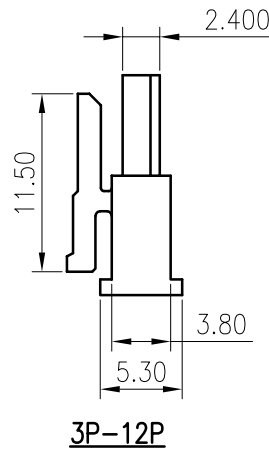
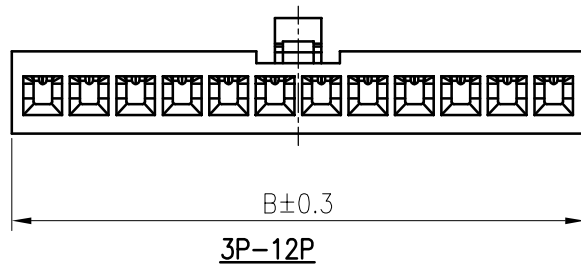
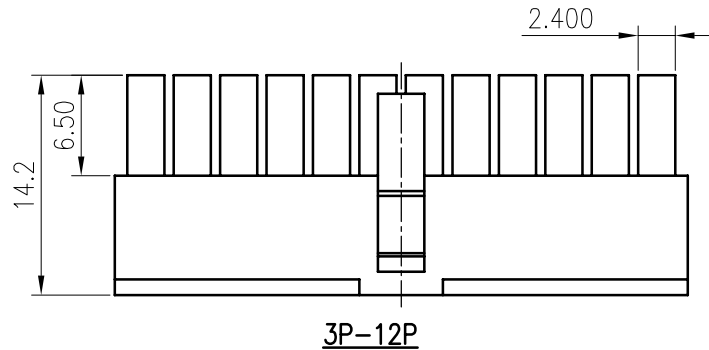


RoHS
COMPLIANT

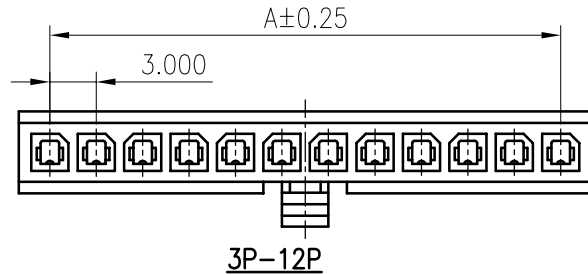

SPECIFICATIONS

1. Current rating: 5A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C $\triangle A4$
4. Insulation resistance: 1000M Ω Min.
5. Withstanding voltage: 1500V AC/ minute.
6. Contact resistance: 10m Ω Max.

Material: PA66 UL94 V-0 or V-2

Circuits: 2~12

Suitable: KR3000HM series terminal

Mate With KR3000HF series single row housing and kr3000 series single row wafer

Ordering Code:

H3000M *** ** 01A $\triangle A5$

No. of Circuits
102:2P, 112:12P

Insulator Material
02:PA66 UL94V-0 black
04:PA66 UL94V-2 black

| Circuits | Dimensions | |
|----------|------------|-------|
| | A | B |
| 2P | 3.0 | 7.00 |
| 3P | 6.0 | 10.00 |
| 4P | 9.0 | 13.00 |
| 5P | 12.0 | 16.00 |
| 6P | 15.0 | 19.00 |
| 7P | 18.0 | 22.00 |
| 8P | 21.0 | 25.00 |
| 9P | 24.0 | 28.00 |
| 10P | 27.0 | 31.00 |
| 11P | 30.0 | 34.00 |
| 12P | 33.0 | 37.00 |

| | | | | | | | | | | | |
|---|----------------|---|-----------|------------|---|--|-----------------------|------------|---|------------|-----------|
| F | $\triangle A7$ | | | | TOLERANCE X.X ± 0.30 X.XX ± 0.20 X.XXX ± 0.10 Angle $\pm 2^\circ$ | TITLE: MK3.0 Male Housing Single Row | DRAWN: TLX 2020.04.08 | | KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd. | | |
| | $\triangle A6$ | Uniformly arrange the drawings | Arvin | 2021.09.24 | | | CHECKED: | | | | |
| | $\triangle A5$ | Change the part number and frame format | TLX | 2020.04.08 | | | APPROVED: | | PART NO. : H3000M****01A | | |
| | MARK | REVISION DESCRIPTION | SIGNATURE | DATE | | | UNIT: mm | SCALE: N/A | SHEET: 1/1 | PROJECTION | REV. : A6 |