
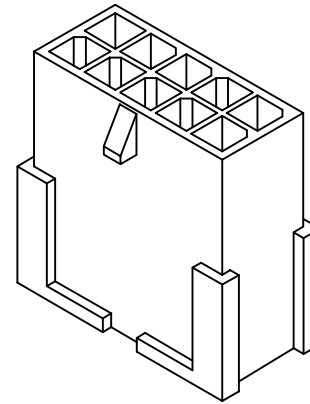


RoHS  
COMPLIANT

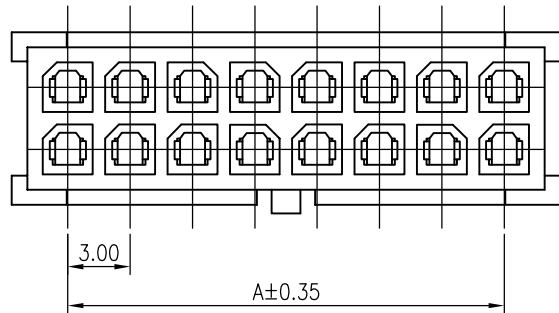

◆ SPECIFICATIONS

- Current rating: 5A AC, DC
- Voltage rating: 250V AC, DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 1500V AC/ minute.
- Contact resistance: 10mΩ Max.

Material: Nylon66 UL94 V-2  
 Suitable: KR3000 series Terminal  
 Mates With KR3000 series dual row male housing  
 and KR3000 series dual row wafer

Ordering Code:



H3000F \*\*\* 04 01B

No. of Circuits

201:2x1, 212:2x12

Insulator Material

04: PA66 Black V-2

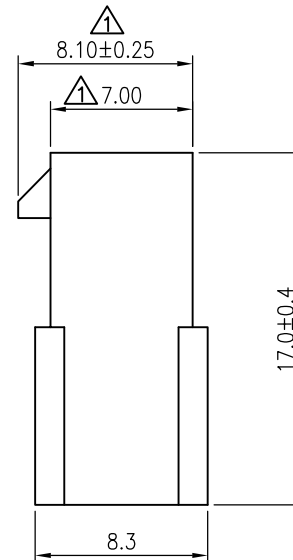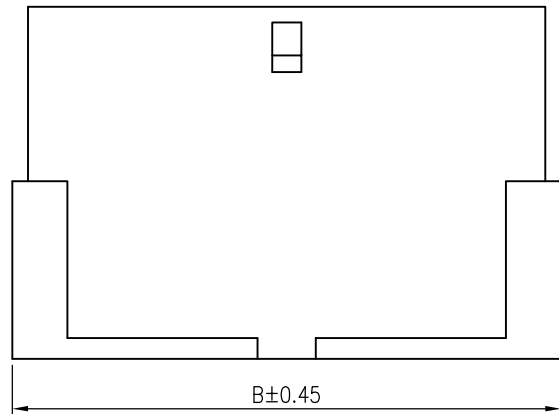

Circuits	Dimension	
	A	B
2x1	----	5.30
2x2	3.0	8.30
2x3	6.0	11.30
2x4	9.0	14.30
2x5	12.0	17.30
2x6	15.0	20.30
2x7	18.0	23.30
2x8	21.0	26.30
2x9	24.0	29.30
2x10	27.0	32.30
2x11	30.0	35.30
2x12	33.0	38.30

F					<b>TOLERANCE</b> X. X ±0.30 X. XX ±0.20 X. XXX ±0.10 Angle ±2°	<b>TITLE:</b> MK3.0 Double Row Female Housing No Wings	<b>DRAWN:</b> <i>Arvin 2015.03.11</i>	<b>KONNRA</b> 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd.						
											<b>CHECKED:</b>  <b>APPROVED:</b>	PART NO. : H3000F***0401B		
		Change the part number and frame format	ZSZ	2022.03.14									<b>REVISION DESCRIPTION</b>	<b>DRAWING NO. : 3000HF201-B-S</b>
	<b>MARK</b>		<b>SIGNATURE</b>	<b>DATE</b>										
	1	2	3	4	5	6	7	8	9					