
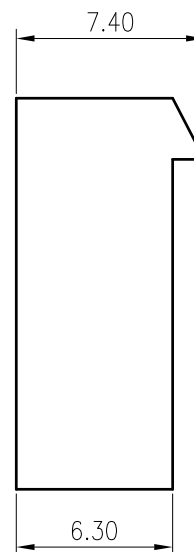
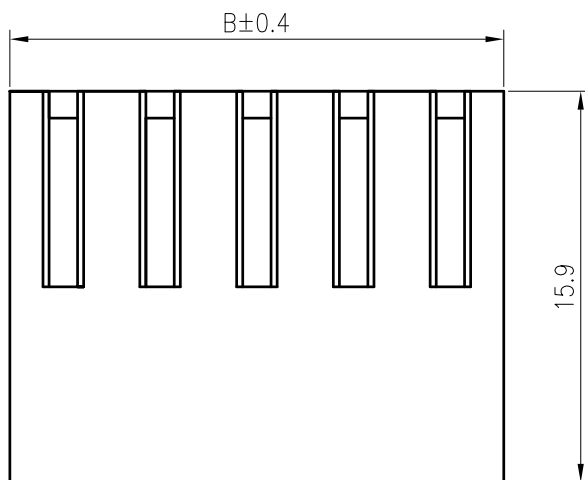
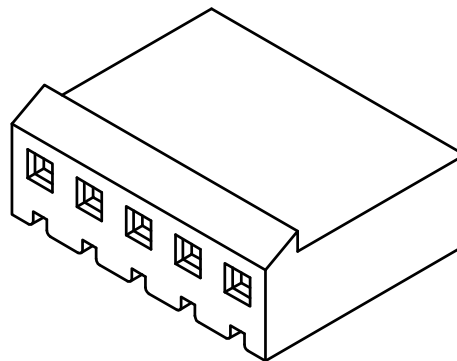


**RoHS**  
COMPLIANT

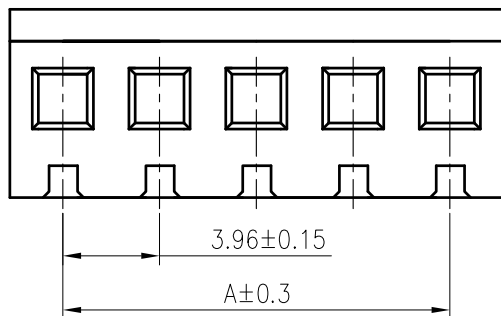

**SPECIFICATIONS**

1. Current rating: 7A AC, DC
2. Voltage rating: 250V AC, DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 1500V AC/ minute.
6. Contact resistance: 20mΩ/ max.

Material: PA66 UL94 V-2  
Suitable KR3960 series terminal  
Mate with KR3960 series Wafer

Ordering Code:

H39600 xxx 16 01A

No. of Circuits  
102:2, 116:16

Insulator Material  
16: PA66 Transparent

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2	3.96	8.42	8	27.72	32.18
3	7.92	12.38	9	31.68	36.14
4	11.88	16.34	10	35.64	40.10
5	15.84	20.30	11	39.60	44.06
6	19.80	24.26	12	43.56	48.02
7	23.76	28.22			

MARK	REVISION DESCRIPTION	SIGNATURE	DATE
A4			
A3	Uniformly arrange the drawings	ZSZ	2022.1.8
A2	Change the part number and frame format	Arvin	2020.03.05

TOLERANCE  
X.X ±0.30  
X.XX ±0.20  
X.XXX ±0.10  
Angle ±2°

TITLE: MX3.96 Housing  
UNIT: mm SCALE: N/A

DRAWN: Arvin 2020.03.24  
CHECKED:  
APPROVED:  
SHEET: 1/1 PROJECTION

**KONNRA** 东莞市康瑞电子有限公司  
DongGuan Konnra Electronics Co., Ltd.  
PART NO.: H39600xxx1601A  
REV.: A3 DRAWING NO.: 3960H101-A-S