
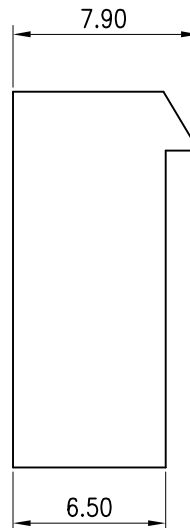
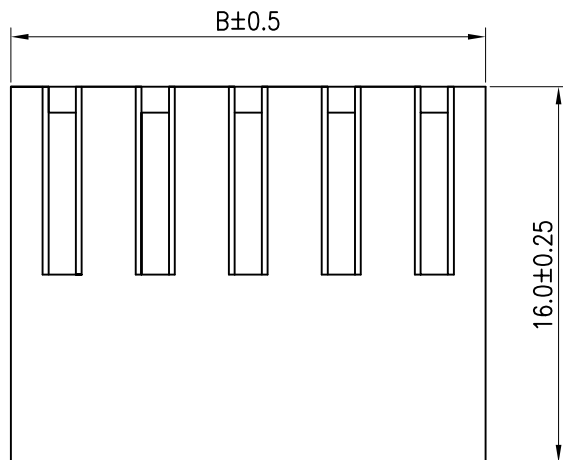
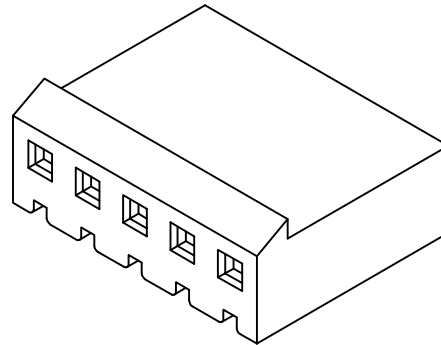


**RoHS**  
COMPLIANT

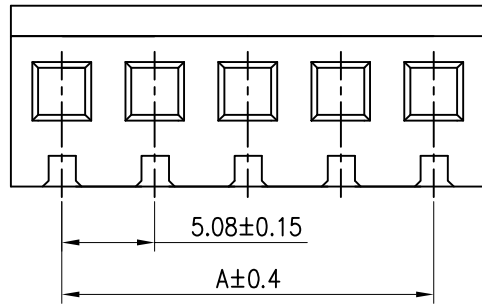

**SPECIFICATIONS**

1. Current rating: 7A AC, DC
2. Voltage rating: 250V AC, DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 1500V AC/ minute.
6. Contact resistance: 20mΩ/ max.

Material: PA66 UL94 V-2  
Suitable KR3960 series terminal  
Mate with KR5081 series Wafer

Ordering Code:

H50810 xxx 16 01B

No. of Circuits  
102:2, 114:14

Insulator Material  
16: PA66 Transparent

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2	5.08	10.16	9	40.64	45.72
3	10.16	15.24	10	45.72	50.80
4	15.24	20.32	11	50.80	55.88
5	20.32	25.40	12	55.88	60.96
6	25.40	30.48	13	60.96	66.04
7	30.48	35.56	14	66.04	71.12
8	35.56	40.64			

MARK	REVISION DESCRIPTION	SIGNATURE	DATE	TOLERANCE	TITLE:	DRAWN:	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd.			
A3				X. X ±0.30	MK5.08 Housing	Arvin 2020.03.24	PART NO.: H50810xxx1601B			
A2			X. XX ±0.20	CHECKED:						
A1			X. XXX ±0.10	APPROVED:						
				Angle ±2°	UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION	REV.: A1	DRAWING NO.: 5081H101-B-S