

<b>Product Specification(产品规格书)</b>	<b>Issued By: Engineering Dept.</b>	
<b>Subject (主题):</b> 1.20mm Pitch KR1201 Series Connector Specification	<b>Date Issued</b>	2022/2/26
	<b>Date Revised</b>	2022/2/26
<b>Document Number:</b> PS-KR1201-01	<b>Revised /Edition</b>	A1

### 1.0 适用范围 (Scope)

此种规格包括1.20mm Pitch KR1201 Series 连接器规格说明。

This Specification Covers the 1.20mm Pitch KR1201 Series Connector Specification.

### 2.0 规格与料号 (Spec and Part number)

规格内容 <b>Specification</b>	产品料号 <b>Production No.</b>	产品图示 <b>Picture of Product</b>
胶壳/Housing	H120101**0701A H120101**1300A	
端子/Terminal	T12000PG0201A	
针座/Wafer	C1201RS1**11G0201RA C1201RS1**13G0200RA	

### 3.0 材质与表面处理 (Disposal of Material and surface)

规格内容 <b>Specification</b>	材质 <b>Materials</b>	表面处理 <b>Disposal of Surface</b>		
胶壳/Housing	LCP or PA46	UL94 V-0		
端子/Terminal	Phosphor bronze	Gold Plated Over Nickel		
针座/ Wafer	立式 Straight (SMT 180°)	主体 Base	N/A	N/A
		导体 Contact	N/A	N/A
		固定片 Solder tab	N/A	N/A
	卧式 Right Angle (SMT 90°)	主体 Base	PA9T or LCP	UL94 V-0
		导体 Contact	Phosphor Bronze	Gold Plated Over Nickel
		固定片 Solder tab	Brass	Matte-Tin Plated Over Nickel

(以上参数请以工程图为准/Please Refer to the Project drawing for the above Specification)

<b>Product Specification(产品规格书)</b>	<b>Issued By: Engineering Dept.</b>	
	<b>Date Issued</b>	2022/2/26
<b>Subject (主题):</b> 1.20mm Pitch KR1201 Series Connector Specification	<b>Date Revised</b>	2022/2/26
	<b>Revised /Edition</b>	A1
<b>Document Number:</b> PS-KR1201-01		

**4.0 额定等级 (Ratings and applicable wires)**

项 目 Item	规 格 Standard	
额定电压Rated Voltage (Max.)	50V	AC/DC
额定电流Rated Current (Max.)	1.5A(28AWG)	
使用温度范围Ambient temperature Range	-40°C~+105°C	
适用线径Applicable wire insulation O.D	AWG 28#~30# Insulation O.D. 0.75mm(Max.)	

**5.0 电气性能 (Electrical Performance)**

项 目 Item	条 件 Test Condition	规 格 Requirement
5.1 接触阻抗 Contact Resistance	公母配合,开放电压 20mV 最大,电流 100mA最大 检测连接器A~B 区. Mate connectors, measure by dry circuit, 20mV MAX, 100mA MAX. (Based upon EIA-364-23C)	20 milliohms Max.
5.2 绝缘阻抗 Insulation Resistance	公母配合,对相邻两接触导体,于1分钟内施 加500V 的直流电,并量测其间绝缘阻抗. Mate connectors, Apply 500V DC for 1 minute between adjacent contacts to measure the insulation resistance. (Based upon EIA-364-21B)	100 Megohms Min.
5.3 耐电压 Dielectric Strength	公母配合,在相邻端子或端子与接地端之 间,使用500V 的交流电1 分钟,检测连接器. Mate connectors, apply 500V AC for 1 minute between adjacent terminal or ground. (Based upon EIA-364-20A)	无损毁或出现电火花 No Breakdown and Flashover

<b>Product Specification(产品规格书)</b>		<b>Issued By: Engineering Dept.</b>	
<b>Subject (主题):</b> 1.20mm Pitch KR1201 Series Connector Specification		<b>Date Issued</b>	2022/2/26
		<b>Date Revised</b>	2022/2/26
<b>Document Number:</b> PS-KR1201-01		<b>Revised /Edition</b>	A1

**6.0 机械性能 (Mechanical Performance)**

项 目 Item		条 件 Test Condition			规 格 Requirement		
6.1	耐久性 Durability	以每分钟25.4±3mm的速率插入和拔出。 (不包含卡榫结合力) Insert and withdraw connectors at the speed rate of 25.4±3mm/minute. (Excluding plastic detents) (Based upon EIA-364-13D)			参照第8.0项 Refer to paragraph 8.0		
6.2	端子插入力 Terminal Insertion Force	铆线后之端子插入胶壳。 Insert the crimped terminal into the housing.			0.5 kgf (4.9 N) Max.		
6.3	端子保持力 Terminal/ Housing Retention Force	以每分钟 25.4±3mm 的速率,将端子从 Housing内轴向拔出的力量。 Apply axial pull out force at the speed rate of 25.4±3mm/minute on the terminal assembled in the housing.			0.4 kgf (3.92 N) Min.		
6.4	Pin 针保持力 Pin Retention Force	以每分钟 25.4±3mm 的速率,将PIN针从 Wafer 内轴向拔出的力量。 Apply axial push force at the speed rate of 25.4±3mm/minute.			0.2 kgf (1.96 N) min.		
6.5	端子压接 Terminal Crimping Specification	Wire Size		28 AWG	30 AWG	/	/
		①	Crimp width	0.80-0.85	0.80-0.85	/	/
			Crimp height	0.45±0.05	0.45±0.05	/	/
		②	Crimp width	0.90 Max	0.85 Max	/	/
			Crimp height	0.75 Max	0.70 Max	/	/
		Crimp strength (kgf)		1.36 Min	0.9 Min	/	/
		Stripping (mm)		1.2~1.4			
①Conductor(mm) ②Insulation(mm)							

<b>Product Specification(产品规格书)</b>		<b>Issued By: Engineering Dept.</b>	
<b>Subject (主题):</b> 1.20mm Pitch KR1201 Series Connector Specification		<b>Date Issued</b>	2022/2/26
		<b>Date Revised</b>	2022/2/26
<b>Document Number:</b> PS-KR1201-01		<b>Revised /Edition</b>	A1

**7.0 环境性能及其它 (Environmental Performance and Others)**

项 目 Item		条 件 Test Condition	规 格 Requirement	
7.1	重复插拔 Repeated Insertion/ Withdrawal	以每分钟不超过 10 次的速率,将公母插拔10次. When mated up to 10 cycles repeatedly by the rate of 10 cycles per minute. (Based upon EIA-364-09C)	接触阻抗 Contact Resistance	40 milliohms Max.
7.2	温升测试 Temperature Rise	公母对插后,在通过额定电流下,所测定的温度. Carrying rated current load. (Based upon EIA-364-70B)	温升测试 Temperature Rise	30°C Max.
7.3	耐振动性 Vibration	振幅: 1.5mm P-P 时间: 10~55~10 HZ in 1 minute 持续时间: 每轴向 2 小时 Amplitude: 1.5mm P-P Sweep time: 10~55~10 HZ in 1 minute Duration: 2 hours in each X.Y.Z axials. (Based upon EIA-364-28B)	外观 Appearance	无异状 No Damage
			接触阻抗 Contact Resistance	40 milliohms Max.
			瞬断 Discontinuity	1 micro-second Max.
7.4	耐冲击性 Shock	在 X.Y.Z 上 6 个方向上,以 490m/s <sup>2</sup> (50g) 冲击下各 3 回. 490m/s <sup>2</sup> {50g}, 3strokes in each X.Y.Z. axes. (Based upon EIA-364-27B)	外观 Appearance	无异状 No Damage
			接触阻抗 Contact Resistance	40 milliohms Max.
			瞬断 Discontinuity	1 micro-second Max.
7.5	耐热性 Heat Resistance	105±2°C,96 hours. (Based upon EIA-364-17B)	外观 Appearance	无异状 No Damage
			接触阻抗 Contact Resistance	40 milliohms Max.
7.6	耐寒性 Cold Resistance	-40±2°C,96 hours. ( Based upon EIA-364-59)	外观 Appearance	无异状 No Damage
			接触阻抗 Contact Resistance	40 milliohms Max.

<b>Product Specification(产品规格书)</b>		<b>Issued By: Engineering Dept.</b>	
<b>Subject (主题):</b> 1.20mm Pitch KR1201 Series Connector Specification		<b>Date Issued</b>	2022/2/26
		<b>Date Revised</b>	2022/2/26
<b>Document Number:</b> PS-KR1201-01		<b>Revised /Edition</b>	A1

项 目 Item		条 件 Test Condition	规 格 Requirement	
7.7	耐湿性 Humidity	温度: 40±2°C 湿度: 90~95%(RH) 持续时间: 96 hours Temperature: 40±2°C Relative Humidity: 90~95% Duration: 96 hours (Based upon EIA-364-31B)	外观 Appearance	无异状 No Damage
			接触阻抗 Contact Resistance	40 milliohms Max.
			耐电压 Dielectric Strength	Must meet 5.3
			绝缘阻抗 Insulation Resistance	100 Megohms Min.
7.8	热冲击 Thermal shock	以-40°C持续30分钟经室温5分钟,而后以105°C持续30分钟再经室温5分钟为一个循环,共循环5次。 One Cycle Consists Of: -40°C for 30 minutes. → Room Temp. 5 minutes, +105°C for 30minutes. → Room Temp. 5 minutes Total Cycles: 5 Cycles. (Based upon EIA-364-32B)	外观 Appearance	无异状 No Damage
			接触阻抗 Contact Resistance	40 milliohms Max.
7.9	盐水喷雾 Salt Spray	在温度35±2°C,盐水浓度5±1%下,盐水喷雾24小时。 24 hours exposure to a salt spray from the 5±1% solution at 35±2°C. (Based upon EIA-364-26B)	外观 Appearance	无异状 No Damage
			接触阻抗 Contact Resistance	40 milliohms Max.
7.10	焊锡附着性 Solder-ability	焊接时间: 3±0.5 秒。 焊接温度: 245±5°C。 Soldering Time: 3±0.5second. Solder Temperature: 245±5°C. (Based upon EIA-364-52)	Solder Wetting	浸渍面积需95%以上 95% of immersed area must show no voids, pin holes.

<b>Product Specification(产品规格书)</b>		<b>Issued By: Engineering Dept.</b>	
<b>Subject (主题):</b> 1.20mm Pitch KR1201 Series Connector Specification		<b>Date Issued</b>	2022/2/26
		<b>Date Revised</b>	2022/2/26
<b>Document Number:</b> PS-KR1201-01		<b>Revised /Edition</b>	A1

项 目 Item		条 件 Test Condition	规 格 Requirement	
7.11	焊锡耐热性 Solder-Resistance	焊接时间: 5~10 秒. 焊接温度: 255+5/-5°C. Soldering Time:5~10 sec Solder Temperature:255+5/-5°C. (Based upon EIA-364-56A)	外观 Appearance	无异状 No Damage


### 8.0 综合插入力及拔出力 (INSERTION/WITHDRAWAL FORCE)

<Unit: kgf>

No. of Circuits PIN数	At Initial 首次插入与拔出力 (初始值)		At 10 <sup>th</sup> 10次插入 与拔出后 R.F.(MIN.) 拔出力	No. of Circuits PIN数	At Initial 首次插入与拔出力 (初始值)		At 10 <sup>th</sup> 10次插入与 拔出后 R.F.(MIN.) 拔出力
	I.F.(MAX.) 插入力	R.F.(MIN.) 拔出力			I.F.(MAX.) 插入力	R.F.(MIN.) 拔出力	
2	1.84	0.12	0.12	7	3.30	0.18	0.18
3	2.14	0.12	0.12	8	3.60	0.21	0.21
4	2.45	0.12	0.12	9	3.90	0.24	0.24
5	2.76	0.12	0.12	10	4.20	0.27	0.27
6	3.00	0.15	0.15				

<b>Product Specification(产品规格书)</b>	<b>Issued By: Engineering Dept.</b>	
	<b>Date Issued</b>	2022/2/26
<b>Subject (主题):</b> 1.20mm Pitch KR1201 Series Connector Specification	<b>Date Revised</b>	2022/2/26
	<b>Revised /Edition</b>	A1
<b>Document Number:</b> PS-KR1201-01		

**9.0 SMT 红外线回流条件 (SMT INFRARED REFLOW CONDITION)**

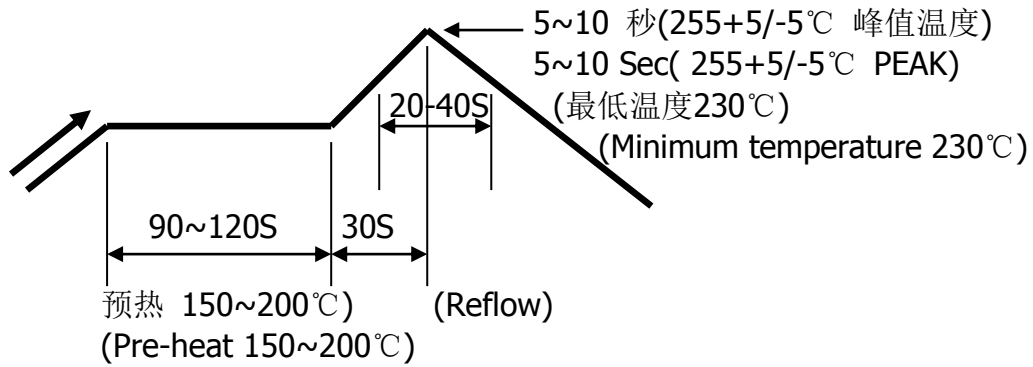

温度条件曲线图/ 基板上温度

TEMPERATURE CONDITION GRAPH/ (TEMPERATURE ON BOARD PATTERN SIDE)

注记: 由于 P.C 板等焊接装置改变条件,所以请预先用自己的装置检查回流焊的条件.

Notes: Please check the reflow soldering condition by your own devices beforehand. Because the condition changes by the soldering devices, P.C. boards, and so on.

**10.0 备注 (Remark)**

有关规格书内容经变更或改版,如未能及时发布与通知,烦请联系我司业务人员提供产品最新资讯

Any change or revision for the product specification will not be announced in advance.

Please contact our sales representative for the latest information.

Written: Arvin

Checked: /

Approved: Min xinhao