


**RoHS**  
COMPLIANT

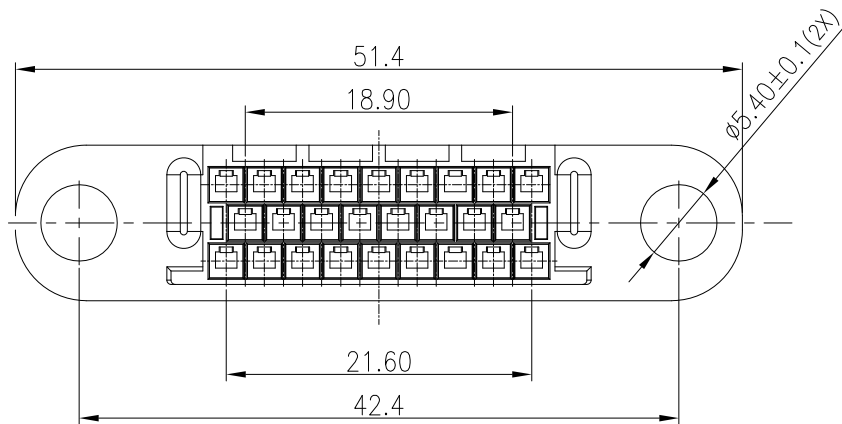

**SPECIFICATIONS**



1. Current rating: 2.0A AC, DC
2. Voltage rating: 250V AC, DC
3. Temperature range:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
4. Insulation resistance: 1000M $\Omega$ / min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20m $\Omega$ / max.

**Material:**

Insulator: PBT UL 94V-0

Contact: Copper alloy

Nail: Copper alloy

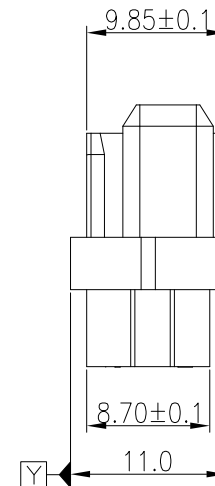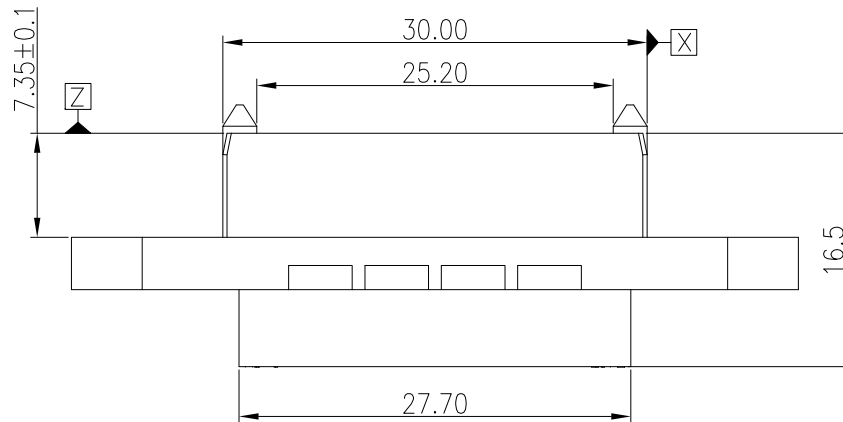

F					TOLERANCE	TITLE:	DRAWN: Shen 2022.06.28	KONNRA 东莞市康瑞电子有限公司		
		Change tolerance	Shen	2022.09.23	X.X $\pm 0.30$	JST 2.7 Housing 26P	CHECKED:	DongGuan Konnra Electronics Co.,Ltd.		
		NEW DWG	Shen	2022.06.28	X.XX $\pm 0.20$		APPROVED:	PART NO.: QK000015		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE	X.XXX $\pm 0.10$	UNIT:mm	SCALE: 1/1	SHEET: 1/1	PROJECTION	REV.: A1
	1	2	3	4	5	6	7	8	9	