
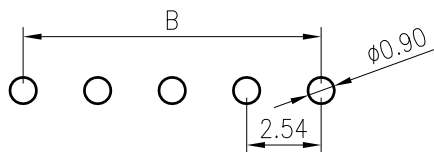
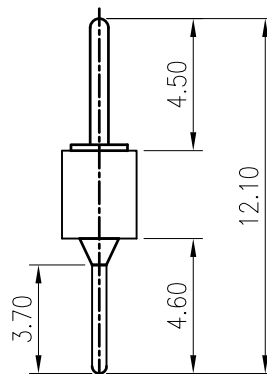
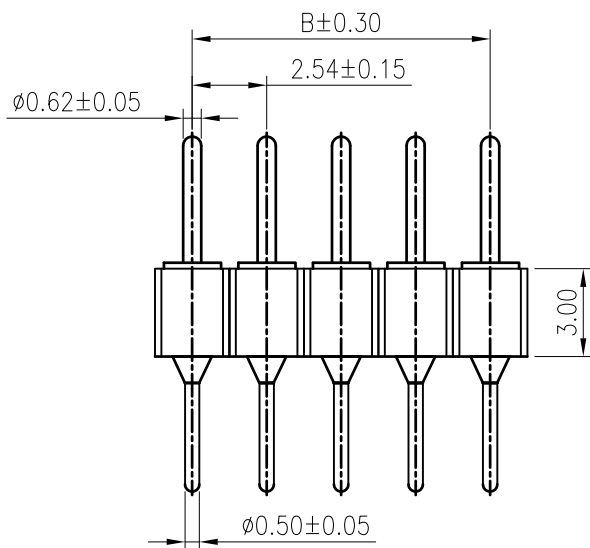


RoHS
COMPLIANT

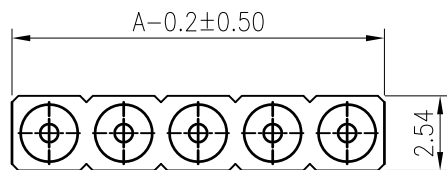

Recommended P.C.B. Layout
Total tolerance:±0.05mm

SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 125V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 20mΩ/ max.

Material:

Insulator: PPS UL 94V-0,Black

Contact: Brass

Plating: gold flash plated over Nickel

Mate with KR2542 series female header

Ordering Code: C2542VD1**51G0106PH

102=2P
140=40P

A=2.54xCircuits
B=A-2.54

TOLERANCE

X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±2°

TITLE:

DP2.54 DIP 180° 圆
孔排针 L12.1 PA4.5
H3.0 D4.60

DRAWN:

353 2024.1.12

CHECKED:

APPROVED:

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co.,Ltd.

PART NO.:C2542VD1**51G0106PH

MARK

REVISION DESCRIPTION

SIGNATURE

DATE

UNIT:mm

SCALE:N/A

SHEET:1/1

PROJECTION

REV.:A01

DRAWING NO.:2542WVD106-H-S

1

2

3

4

5

6

7

8

9