

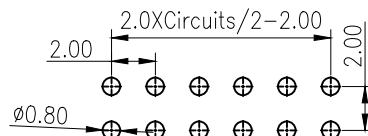



RoHS
COMPLIANT

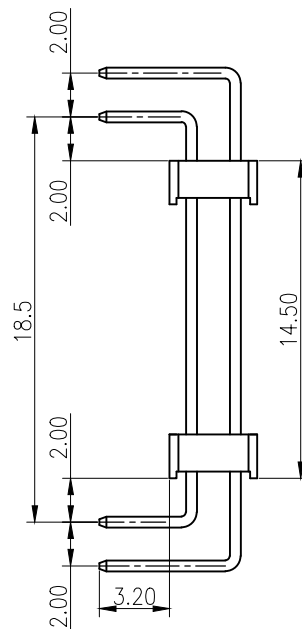

Recommended P.C.B. Layout
Total tolerance: ±0.05mm

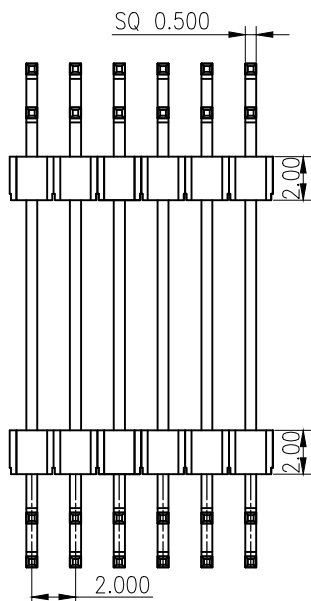

SPECIFICATIONS

1. Current rating: 2A AC, DC
2. Temperature range: -40°C ~ +105°C
3. Insulation resistance: 1000MΩ min.
4. Withstanding voltage: 500V AC/ minute.
5. Contact resistance: 20mΩ max.

Material:

Insulator: PA6T UL 94V-0,Black

Contact: BRASS

Plating: gold flash

Circuits: 2*2 - 2*40P

Ordering Code:

C2028RD 2** 10G0102BA

No. of Circuits
202: 2*2P, 240: 2*40P

F	△A04				TOLERANCE	TITLE:	DRAWN:	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.	
	△A03				X.X ±0.30	PITCH 2.0 PIN HEADER	CHECKED:		
	△A02				X.XX ±0.20	DUAL ROW 90DERGEE	APPROVED:	PART NO.: C2028RD2**10G0102BA	
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE	X.XXX ±0.10	ANGLE MOLDING	SHEET: 1/1	PROJECTION	REV.: A01
	1	2	3	4	5	6	7	8	9