

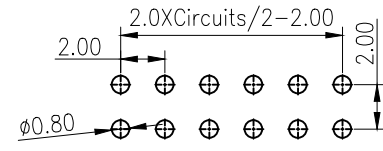



**RoHS**  
COMPLIANT

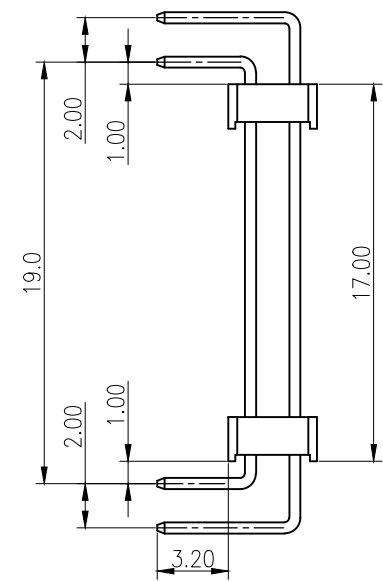

Recommended P.C.B. Layout  
Total tolerance:  $\pm 0.05\text{mm}$

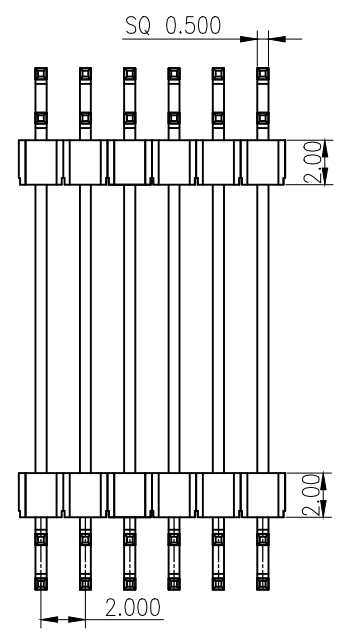

**SPECIFICATIONS**

1. Current rating: 2A AC, DC
2. Temperature range:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
3. Insulation resistance: 1000M $\Omega$  min.
4. Withstanding voltage: 500V AC/ minute.
5. Contact resistance: 20m $\Omega$  max.

**Material:**

Insulator: PA6T UL 94V-0,Black  
Contact: BRASS  
Plating: gold flash  
Circuits: 2\*2 - 2\*40P

**Ordering Code:**

C2028RD 2\*\* 10G0101BA  
No. of Circuits  $\left\{ \begin{array}{l} 202: 2*2\text{P}, 240: 2*40\text{P} \end{array} \right.$

F					TOLERANCE	TITLE:	DRAWN:	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.			
					X.X $\pm 0.30$	PITCH 2.0 PIN HEADER	CHECKED:				
					X.XX $\pm 0.20$	DUAL ROW 90DEGREE	APPROVED:	PART NO.: C2028RD2**10G0101BA			
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE	X.XXX $\pm 0.10$	ANGLE MOLDING	UNIT:mm	SCALE: 1:1	SHEET: 1/1	PROJECTION	REV.: A01
	1	2	3	4	5	6	7	8	9		