
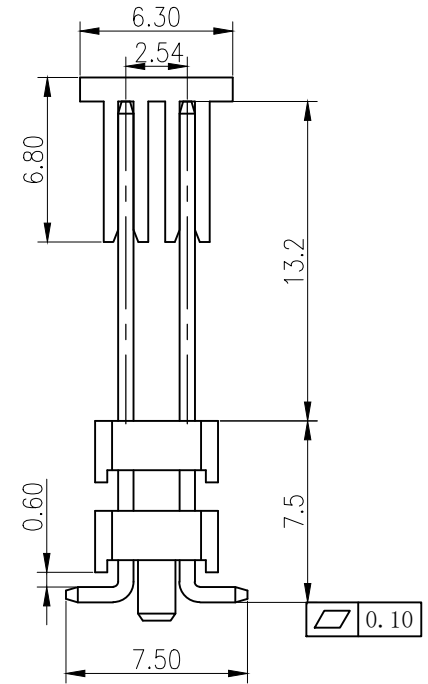
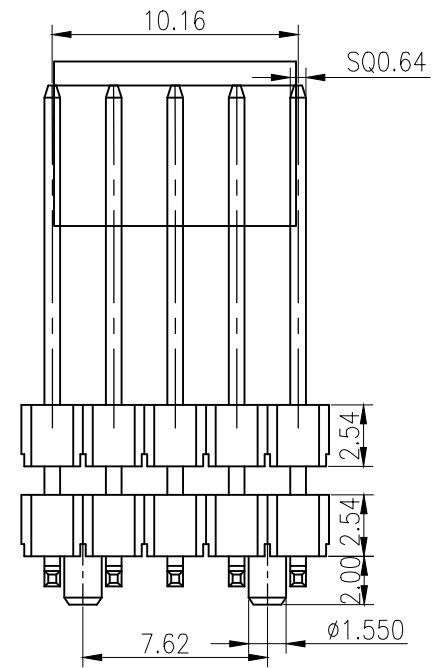


RoHS
COMPLIANT

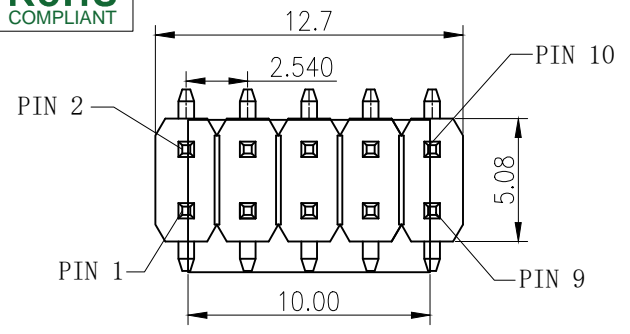


SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Temperature range: -40°C ~ +105°C
3. Insulation resistance: 1000MΩ min.
4. Withstanding voltage: 1000V AC/ minute.
5. Contact resistance: 20mΩ max.

Material:

Insulator: PA9T UL 94V-0,Black
 CAP:PA6T UL 94V-0,Black
 Contact: BRASS
 Plating: gold flash

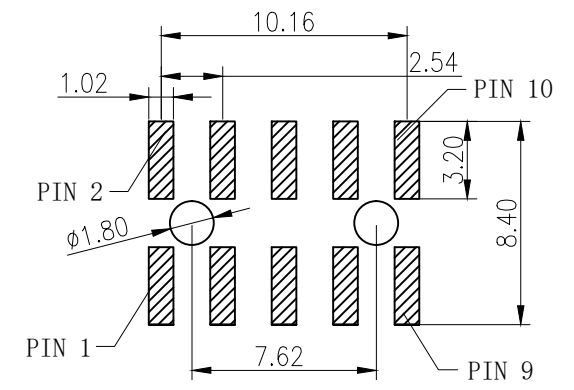

Recommended P.C.B. Layout
 Total tolerance:±0.05mm

F	△A04				TOLERANCE	TITLE:	DRAWN: <i>LCC 2024.06.13</i>	KONNRA 东莞市康瑞电子有限公司			
	△A03				X.X ±0.30	PITCH 2.54 PIN	CHECKED:	DongGuan Konnra Electronics Co.,Ltd.			
	△A02				X.XX ±0.20	HEADER DUAL ROW	APPROVED:	PART NO.:C2542VS20512G0103RH			
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE	X.XXX ±0.10	DOUBLE MOLDING SMT	SHEET: 1/1	PROJECTION	REV.:A01	DRAWING NO.:2542WFVS203-H-S	
	1	2	3	4	Angle ±2°	UNIT:mm	SCALE:1:1	6	7	8	9