
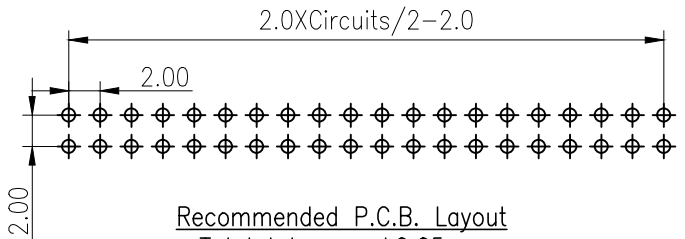
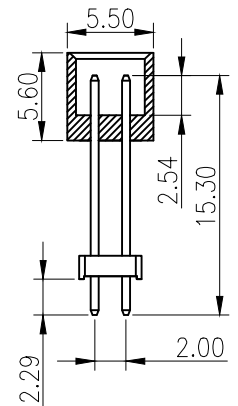
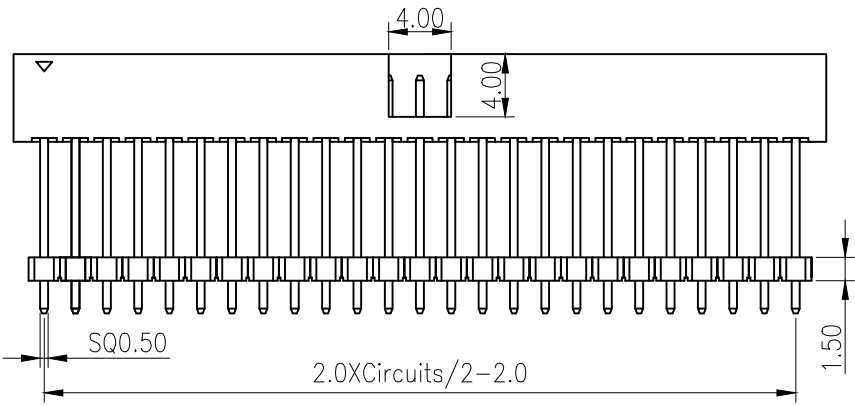


**RoHS**  
COMPLIANT

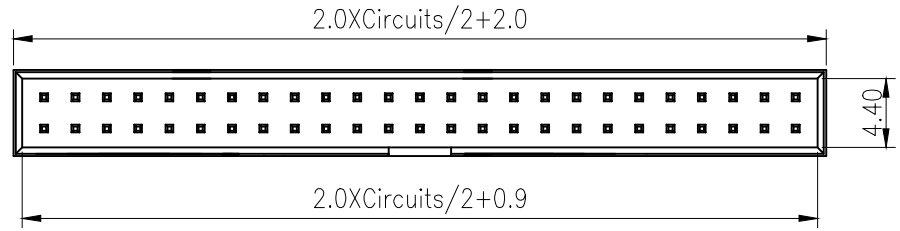

Recommended P.C.B. Layout  
Total tolerance: ±0.05mm

**SPECIFICATIONS**

1. Current rating: 2A AC, DC
2. Temperature range: -40°C ~ +105°C
3. Insulation resistance: 1000MΩ min.
4. Withstanding voltage: 500V AC/ minute.
5. Contact resistance: 20mΩ max.

**Material:**

Insulator: PA6T UL 94V-0,Black  
Contact: BRASS  
Plating: gold flash

Circuits: 2\*3 - 2\*30P

**Ordering Code:**

: C2013VD2\*\*10G0101BD

**No. of Circuits**

203: 2\*3P, 230: 2\*30P

F	△A04				TOLERANCE	TITLE:	DRAWN: LCC 2024.06.12	KONNRA 东莞市康瑞电子有限公司		
	△A03				X.X ±0.30	PITCH 2.0 PIN HEADER	CHECKED:	DongGuan Konnra Electronics Co.,Ltd.		
	△A02				X.XX ±0.20	DUAL ROW STRAIGHT	APPROVED:	PART NO.: C2013VD2**10G0101BD		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE	X.XXX ±0.10	180DERGEE+BOX HEADER	SHEET: 1/1	PROJECTION	REV.: A01	DRAWING NO.: 2013WFD201-H-S
	1	2	3	4	Angle ±2°	UNIT: mm	SCALE: 1:1			