
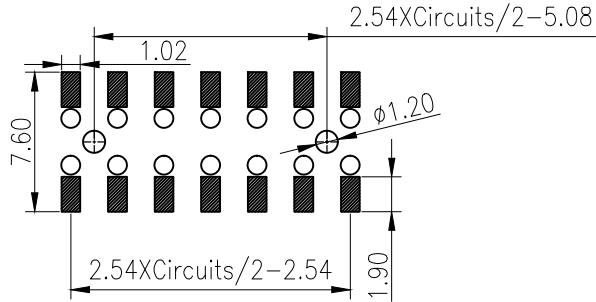
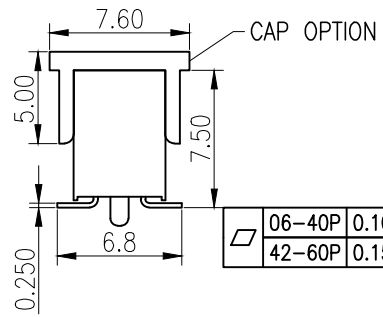
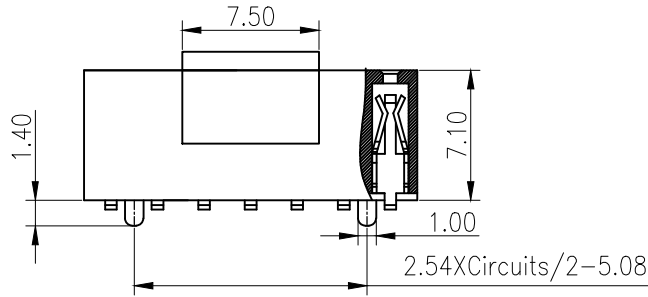


**RoHS**  
COMPLIANT

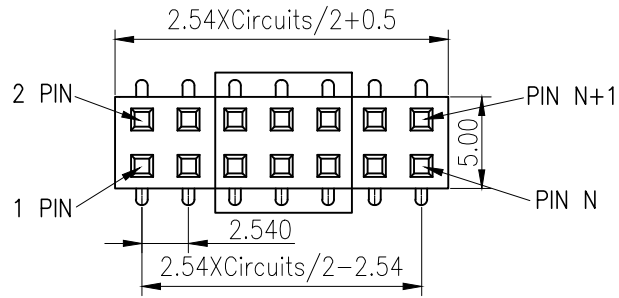

Recommended P.C.B. Layout  
Total tolerance:±0.05mm

**SPECIFICATIONS**

1. Current rating: 3A AC, DC
2. Temperature range: -65°C ~ +125°C
3. Insulation resistance: 1000MΩ min.
4. Withstanding voltage: 1000V AC/ minute.
5. Contact resistance: 20mΩ max.

Material:

Insulator: PA9T UL 94V-0,Black

CAP:PA6T UL 94V-0,Black

Contact: Phosphor bronze

Plating: gold flash

Circuits:2\*3 - 2\*30P

Ordering Code:

C2542FS 2\*\* 12G0103RH

No.of Circuits

203:2\*3P,230:2\*30P

F					TOLERANCE	TITLE:	DRAWN: LCC 2024.06.13	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.	
					X.X ±0.30	PITCH 2.54 FEMALE	CHECKED:		
					X.XX ±0.20	HEADER DUAL ROW	APPROVED:	PART NO.:C2542FS2xx12G0103RH	
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE	X.XXX ±0.10	Angle ±2°	UNIT:mm SCALE:1:1	SHEET:1/1 PROJECTION	REV.:A01 DRAWING NO.:2542WFFS203-H-S
	1	2	3	4	5	6	7	8	9