



RoHS
COMPLIANT

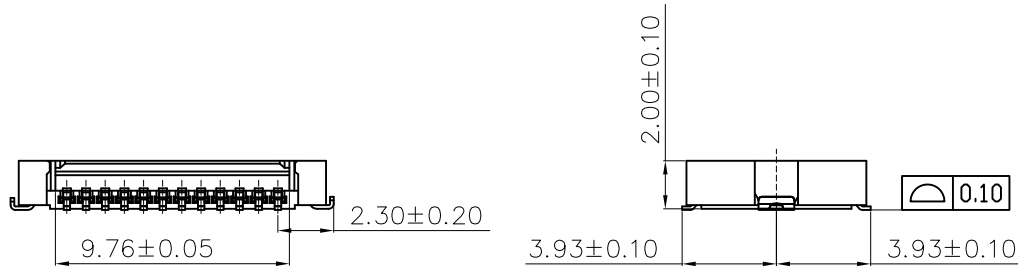

1. MATERIAL:
HOUSING: HEIGHT THERMOPLASTIC, UL94V-0, COLOR: WHITE
CONTACT: PHOSPHOR BRONZE, T=0.15mm
PEG: SUS, T=0.15mm
2. FINISH:
-CONTACT AREA: GOLD FLASH OVER Ni 30u"Min
-SMD AREA: M-Tin100u"Min.
-PEG: M-Tin100u" Min.
3. OPERATING TEMPERATURE: -40~105C°
4. OPERATING VOLTAGE: 100V AC/DC.
5. CURRENT RATING: 2.0AMPS.
6. DIELECTRIC WITHSTANDING VOLTAGE: 250V AC/MINUTE.
7. INSULATION RESISTANCE: 500mΩ MIN.
8. CONTACT RESISTANCE: 20mΩ MAX.

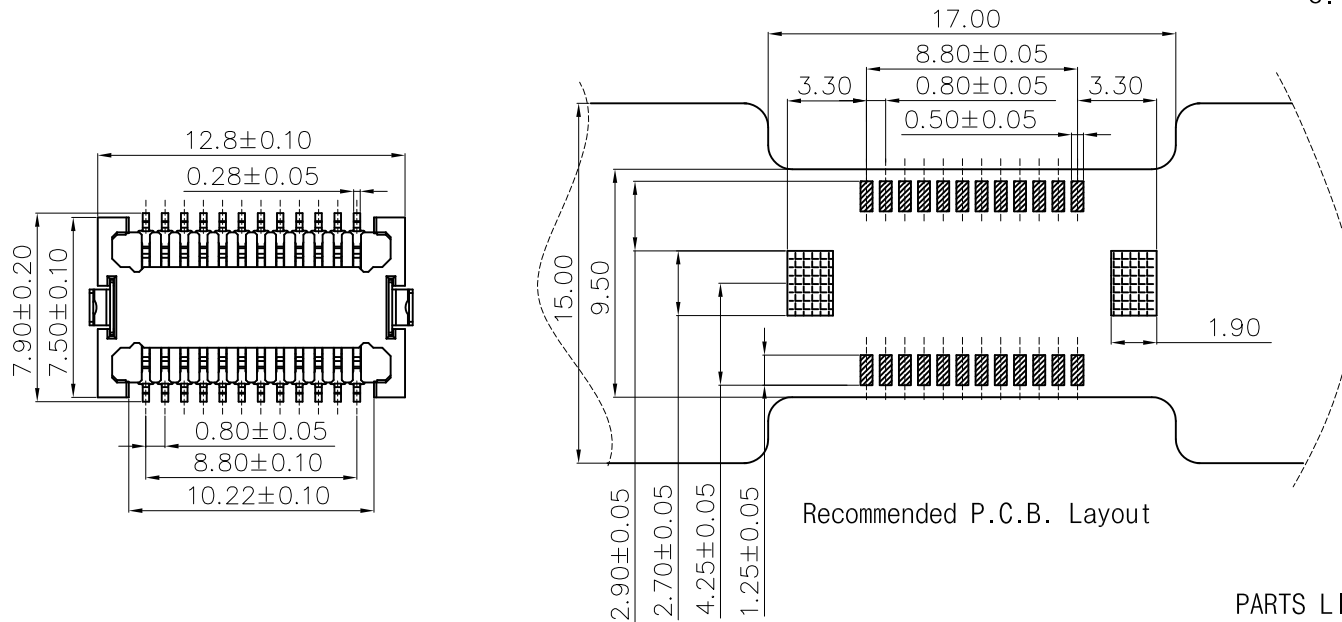

PARTS LIST:

NO.	DESCRIPTION	Q' TY	MATERIAL	FINISH
3	PEG	2	SUS	Tin-Plated
2	CONTACT	24	PHOSPHOR BRONZE	Au-Tin-Plated
1	HOUSING	1	LCP	WHITE

F	△A03				TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±2°	TITLE: 3SETS 24.1 REC CONN.	DRAWN: LCC 2024.06.15	KONNRA 东莞市康瑞电子有限公司			
	△A02							DongGuan Konnra Electronics Co.,Ltd.			
	△A01							PART NO.: QZ000373			
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE	UNIT:mm	SCALE:1:1	SHEET:1/2	PROJECTION	REV.:A01	DRAWING NO.: QZ000373-S	
	1	2	3	4	5	6	7	8	9		