

RoHS
COMPLIANT

SPECIFICATIONS

1. Current rating: 3A (AWG #24)AC, DC
2. Voltage rating: 100V AC,DC
3. Temperature range: -40°C ~ +125°C
4. Insulation resistance:500MΩ Min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 25mΩ Max.

Material: PBT UL94 V-0
Suitable: KR1507 series terminal
Mate with KR1507 series wafer

Ordering Code:

H15070 *** 24 02A






No.of Circuits

102:02,

115:15

Insulator Material

24:PBT White

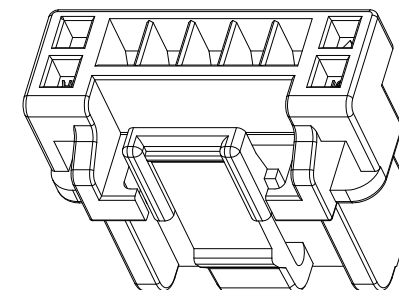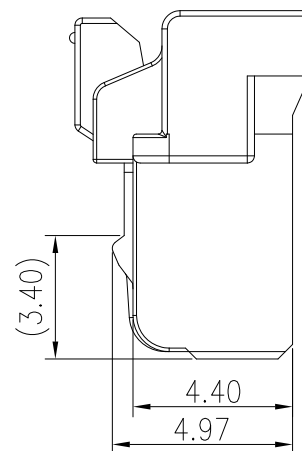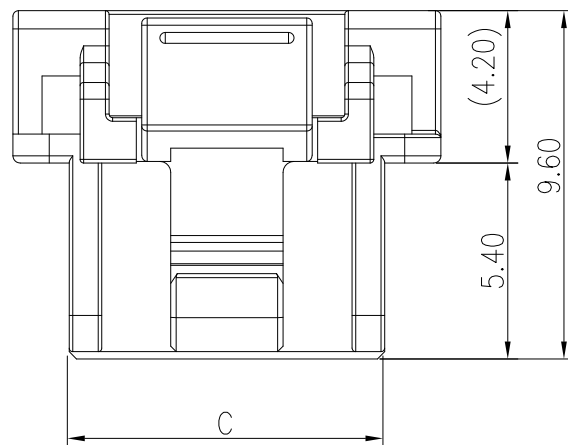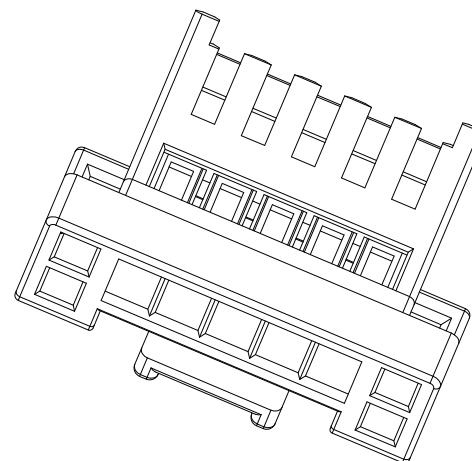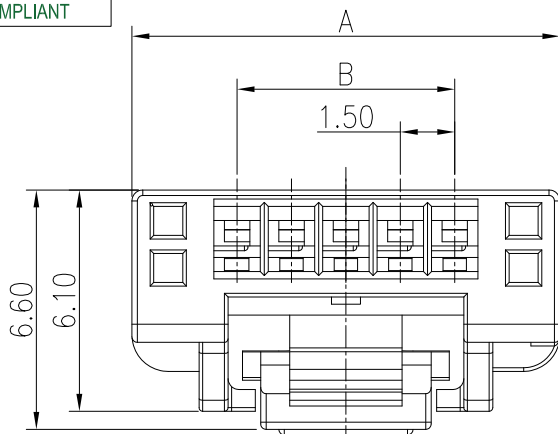

15P	26.80	21.00	23.70
14P	25.30	19.50	22.20
13P	23.80	18.00	20.70
12P	22.30	16.50	19.20
11P	20.80	15.00	17.70
10P	19.30	13.50	16.20
9P	17.80	12.00	14.70
8P	16.30	10.50	13.20
7P	14.80	9.00	11.70
6P	13.30	7.50	10.20
5P	11.80	6.00	8.70
4P	10.30	4.50	7.20
3P	8.80	3.00	5.70
2P	7.30	1.50	4.20
Circuits	A	B	C

△A03				TOLERANCE	TITLE:	DRAWN: <i>liu 2023.11.28</i>	KONNRA 东莞市康瑞电子有限公司	
△A02				X.X ±0.30	MX1.5 Inner buckle	CHECKED:	DongGuan Konnra Electronics CO.,LTD	
△A01	NEW	LIU	2023.11.28	X.XX ±0.20	Housing	APPROVED:	PART NO.:H151101**2401A	
LTR	REVISION DESCRIPTION	SIGNATURE	DATE	X.XXX ±0.10	UNIT:mm	SHEET:1/1	PROJECTION	VER.:A01
				Angle ±3°	SCALE:1/1			DRAWING NO.:1511H101-A-S