

RoHS
COMPLIANT

SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +125°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 25mΩ/ max.

Material: PBT
Suitable: KR1507 series HSG
Mates With KR1507 Series Wafer

Ordering Code:





H150701** ** 11A

102=1*2P

103=1*3P

....

Insulator Material
24:PBT White

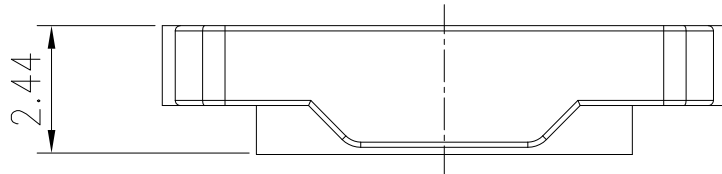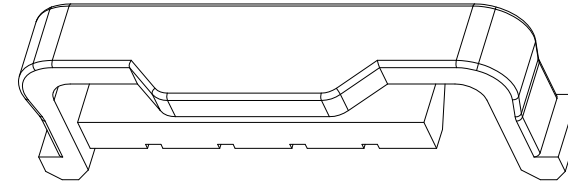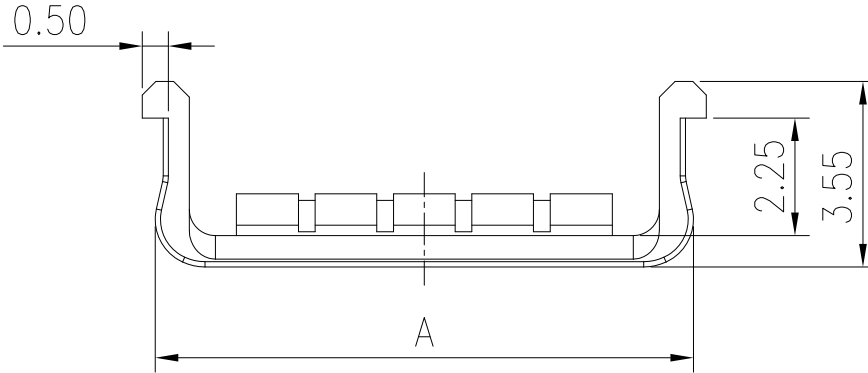

15P	25.30
14P	23.80
13P	22.30
12P	20.30
11P	19.30
10P	17.80
9P	16.30
8P	14.80
7P	13.30
6P	11.80
5P	10.30
4P	8.80
3P	7.30
2P	5.80
Circuits	A

F	A03				TOLERANCE	TITLE:	DRAWN: <i>WESLEY</i> 2023.10.20	KONNRA 东莞市康瑞电子有限公司		
	A02				X.X ±0.30	MX1.5 TPA	CHECKED:	DongGuan Konnra Electronics Co.,Ltd.		
	A01	NEW	Liu	2023.11.28	X.XX ±0.20		APPROVED:	PART NO.: H151101**0211A		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE	X.XXX ±0.10	UNIT:mm	SCALE:N/A	SHEET:1/2	PROJECTION	REV.:A01
	1	2	3	4	Angle ±2°	5	6	7	8	9