
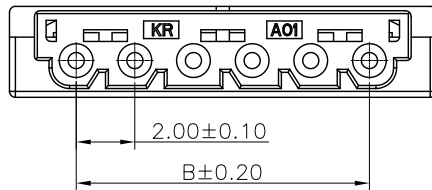
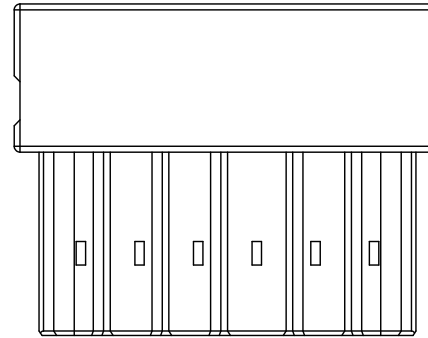
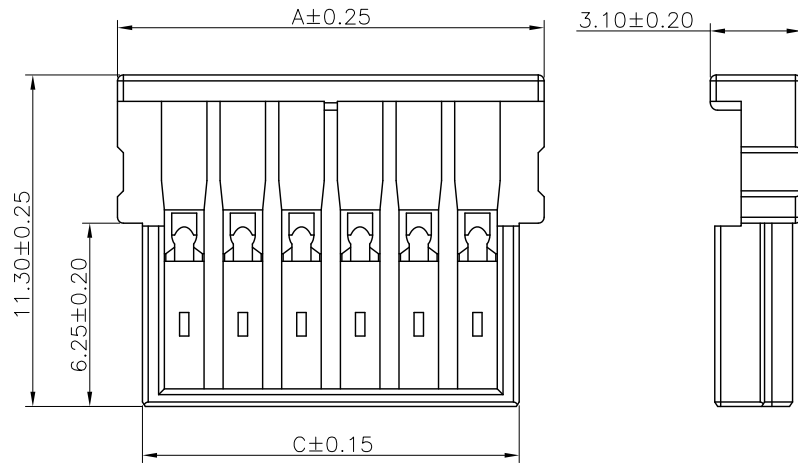
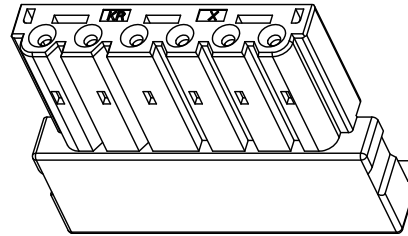


**RoHS**  
COMPLIANT

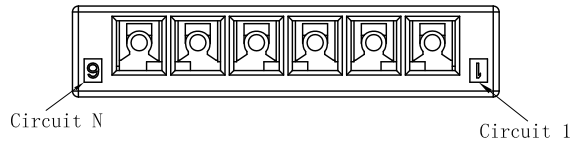

**SPECIFICATIONS**

1. Current rating: 5A AC, DC
2. Voltage rating: 100V AC, DC
3. Temperature range: -40°C ~ +125°C
4. Insulation resistance: 100MΩ/ min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 15mΩ/ max.

Material: Nylon 66 UL 94V-0  
 Suitable: KR2023 series Terminal  
 Suitable: KR2023 series TPA  
 Mates With KR2023 Series Wafer

Ordering Code:

H20230 \*\*\* 02 01 A  
 106:6P  
 02:PA66 Black

Circuits	Dimensions		
	A	B	C
2	/	/	/
4	10.55	6.00	8.85
6	14.55	10.00	12.85
8	/	/	/
10	/	/	/

TOLERANCE  
 X.X ±0.30  
 X.XX ±0.20  
 X.XXX ±0.10  
 Angle ±2°

TITLE:  
 ULH 2.0 HOUSING

DRAWN: *ZZK 2023.12.05*  
 CHECKED:  
 APPROVED:  
 SHEET: 1/1

**KONNRA** 东莞市康瑞电子有限公司  
 DongGuan Konnra Electronics Co.,Ltd.  
 PART NO.: H202301\*\*\*\*01A  
 REV.: A01  
 DRAWING NO.: 2023H101-A-S

MARK	REVISION DESCRIPTION	SIGNATURE	DATE
△A01	设计初版	ZZK	23.12.05

UNIT: mm SCALE: 1:1 PROJECTION